
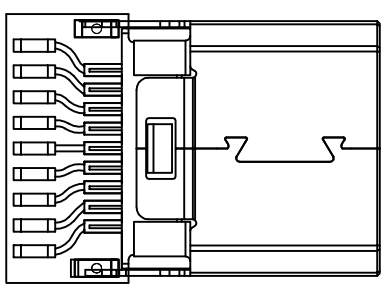
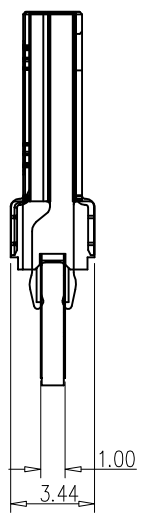
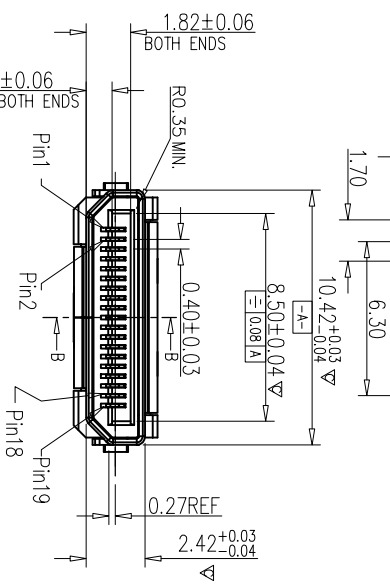

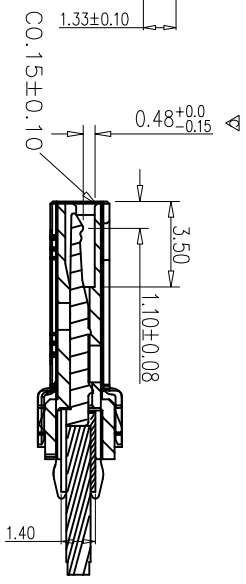


1 2 3 4 5 6 7 8 9 10

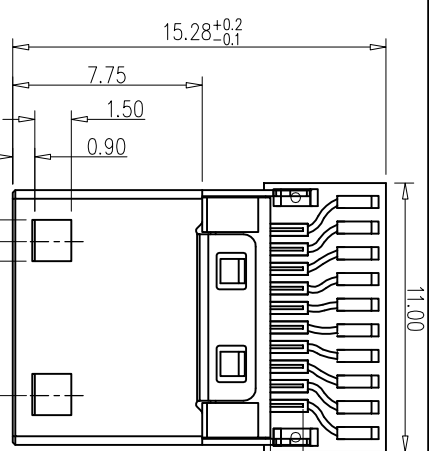

NOTES:
 1.Electrical Characteristics:
 Contact Current Rating: 0.5 Amperes.
 Dielectric Withstanding Voltage: AC 300V r.m.s
 Insulation Resistance:100MΩ Min.
 Contact Resistance:20mΩ Max.
 2.Mechanical Characteristics:
 Contact Insertion Force:4.50Kgf Maximum.
 Contact Separation Force:0.70Kgf Minimum.
 3.Environmental:
 Operating Temperature: -55~+85°
 4.Material:
 Insulator:A:Thermoplastic UL 94V-0.
 B:Hi-Temp Plastic UL 94V-0 Rated.
 Contact:Copper Alloy(t=0.12mm).
 Shell:Copper Alloy(t=0.25mm).

PART NO. E110001-XX

PROPRIETARY NOTE:
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO TECONN COMPANY AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF TECONN COMPANY.

深圳市山谷道电子有限公司
 电话: 0755-27759859
 传真: 0755-27759850

TITLE: MINI HDMI C TYPE19P 公壳体不加肋
 DWG NO: E110001-XX
 SHEET: 1 OF 1 REV: E

NAME	P/N	SHELL MATERIAL/ FINISH	CONTACT FINISH	EDITION
MINI HDMI 19P MALE	E110001-52	SHELL-BRASS AU:60D FLASH NI:50U" MIN	Ni:50u, Au:5u" Tn:100u" Min	E
	E110001-50		Ni:50u, Au:30u" Tn:100u" Min	E
	E110001-51		Ni:50u, Au:15u" Tn:100u" Min	E
	E110001-15		Ni:50u, Au:10u" Tn:100u" Min	E
	E110001-75		Ni:50u, Au:5u" Tn:100u" Min	E
	E110001-47		Ni:50u, Au:15u" Tn:100u" Min	E
E110001-48	Ni:50u, Au:30u" Tn:100u" Min	E		
E110001-16	Ni:50u, Au:10u" Tn:100u" Min	E		

REV	ECN NO	DESCRIPTION	APPD.	DATE
		新增电镀规格料号见▽		06-04-08
	TE2008-048	整合图画		05-28-08
	TE2008-036	整合图画		04-21-08
	TE2008-031	变更电镀规格见		04-02-08