Female Header

Pitch:2.54 x2.54mm

Single Row/ DualRow
DIP /S.M.T

Series
217

sgdconn

Http://www.sgdconn.com

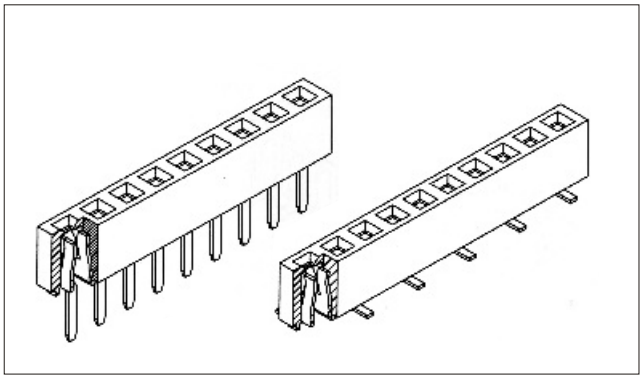

SPECIFICATIONS:

Current Rating: 3.0 AMP
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 600VAC/minute
Operation Temperature: -40℃ to +105℃

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50μ″Ni
Insulator: Glass Filled Polyester(UL94V-0)
Standard: PBT

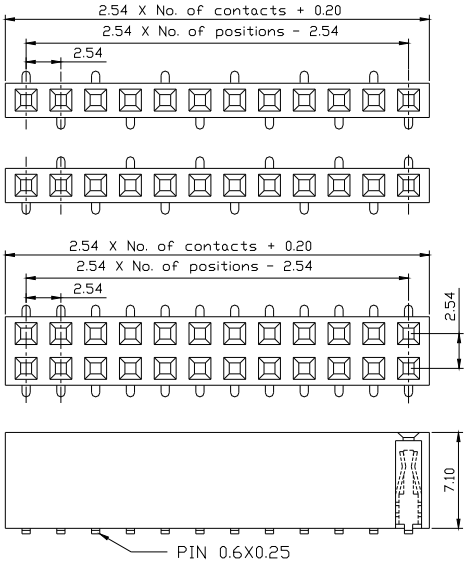

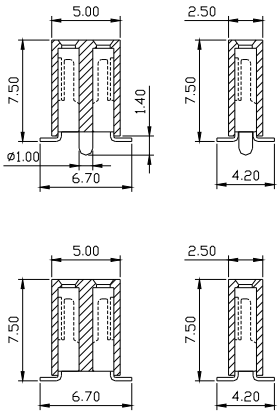

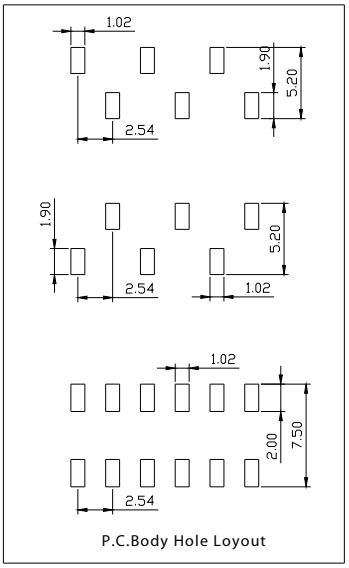

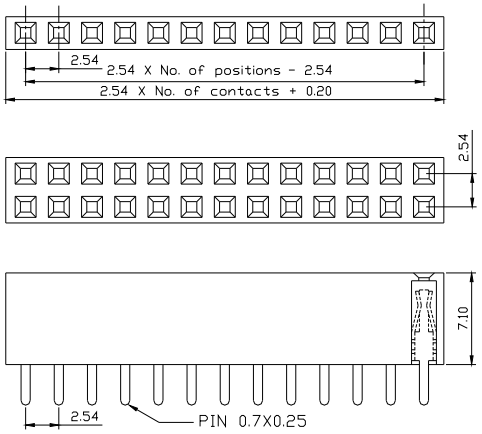





Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
2 1 7 X XX X X X 1 0

① Series No.:
2= Female Header

② Pitch: 1= 2.54mm

③ Insulator Height:
7 = 7.1mm

④ Dip Spacing:
1=Single row
2=Double row

⑤ Number of Contacts:
Single row=01 to 40
Double row=02 to 80

⑥ Tail& Mounting Style:
S=Straight DIP type
M=Straight SMT type

⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

⑨ Color:1=Black

⑩ Customer Request

Due to technical progress, all the information provided is subject to change without prior notice.