

High photosynthesis (H) ±0.1	The female seat height (H1) ±0.05	The male seat height (H2) ±0.05
1.5	1.32	1.25
2.0	1.82	1.25
2.5	2.32	1.25

Electrical
 Voltage: 50 V AC(rms)/DC
 Current: 0.5A AC(rms)/DC
 Contact Resistance: 40 M Ωmax(initial)
 Dielectric Withstanding Voltage: 200 V AC/rms
 Insulation Resistance: 100 MΩ min
 Operating Temp: -40° C ~ +85° C






Ordering Information

SGD-DC-BF-05-***P-H***

F=Female PITCH NO. of pins The female or Male
 M=Male 05=0.5mm 010~080pin seat height (H1)

132=1.32mm
 182=1.82mm
 232=2.32mm

P 数	尺 寸		
	A	B	C
005	5.60	3.50	2.00
006	6.10	4.00	2.50
007	6.60	4.50	3.00
008	7.10	5.00	3.50
009	7.60	5.50	4.00
010	8.10	6.00	4.50
011	8.60	6.50	5.00
012	9.10	7.00	5.50
013	9.60	7.50	6.00
014	10.10	8.00	6.50
015	10.60	8.50	7.00
016	11.10	9.00	7.50
020	13.10	11.00	9.50
025	15.60	13.50	12.00
030	18.10	16.00	14.50
040	23.10	21.00	19.50

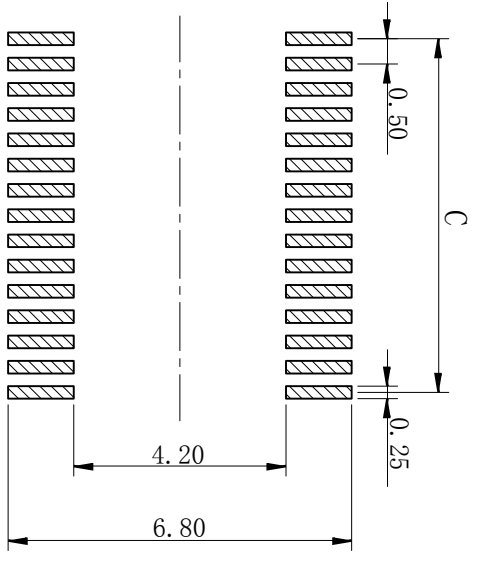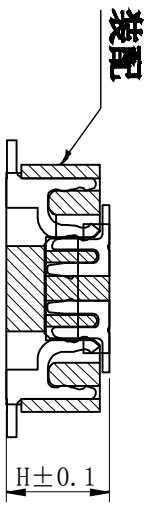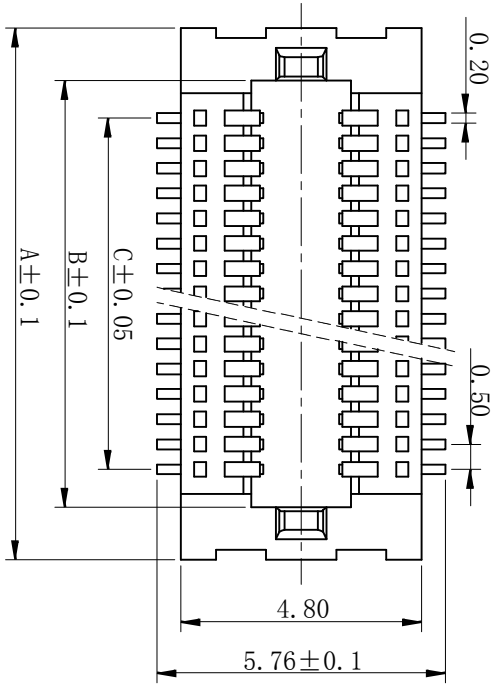

RECOMMENDED PCB PATTERN DIM.
 TOLERANCE : ±0.05

RoHS Compliant
 2013/95/EC
 RoHS Compliant

△	新增焊锡面平整度尺寸	Kavin	08/17/17
△	新增产品尺寸	Kavin	08/16/17
修改	修改重要	签名	日期
SR	REVISION DESCRIPTION	SIGNATURE	DATE (DD)

山谷道

深圳市山谷道电子有限公司
 电话: 0755-27759859 传真: 0755-27759850

一般公差	制图 (DR):	品名 (TITLE):	单槽 0.5-H1.5-2.5 母座无柱
GENERAL TOLERANCE	Kavin	料号 (PART NO.):	SGD-DC-BF-05-***P-H***
A ±0.30	审核 (CMD):	比例 (SCALE):	1:8
XX ±0.20	批准 (APPD):	单位 (UNITS):	mm
XXX ±0.10		张数 (SHEET):	1 OF 1
Z ±0.05		图幅 (SIZE):	A4