

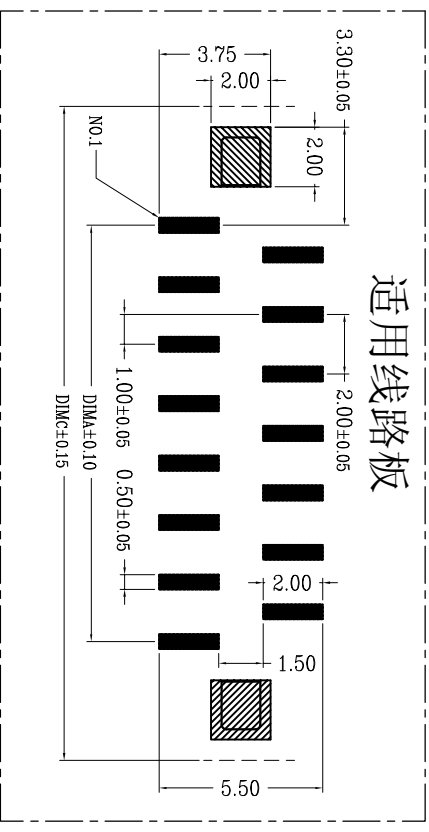
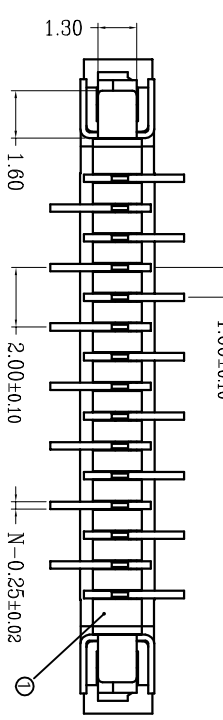
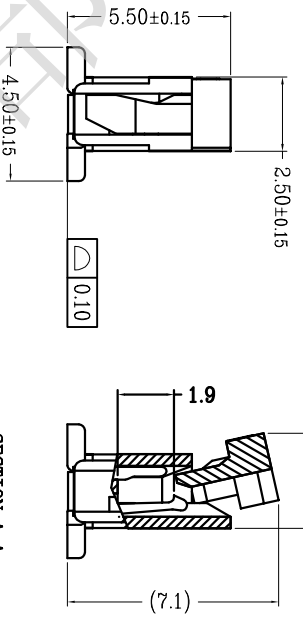
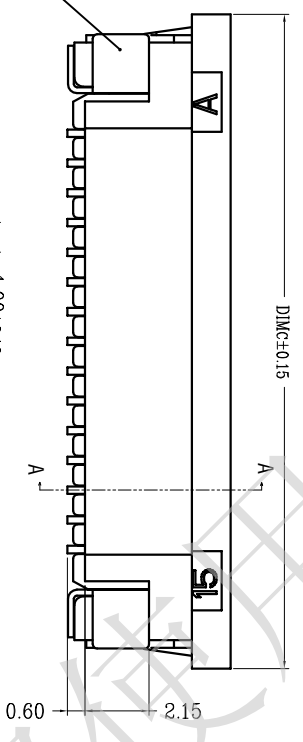
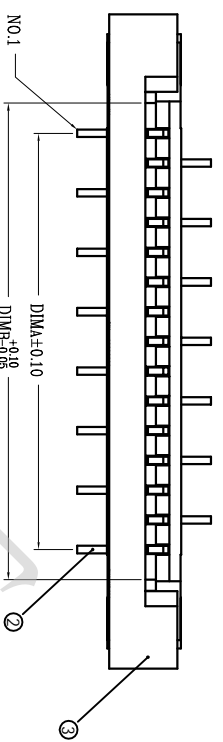


| 序号 | 品名                   | 材质             |
|----|----------------------|----------------|
| ①  | 1.0 K型底座<br>(H2.5)   | LCP UL94V-0 本色 |
| ②  | 1.0 K型立式端子<br>(H2.5) | 磷青铜/表面镀锡       |
| ③  | 1.0 K型后盖<br>(H2.5)   | LCP UL94V-0 黑色 |
| ④  | 1.0 K型立式垫片<br>(H2.5) | 黄铜/表面镀锡        |

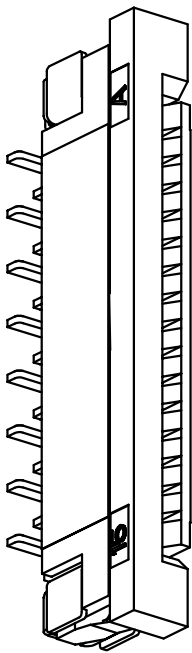

适用线路板

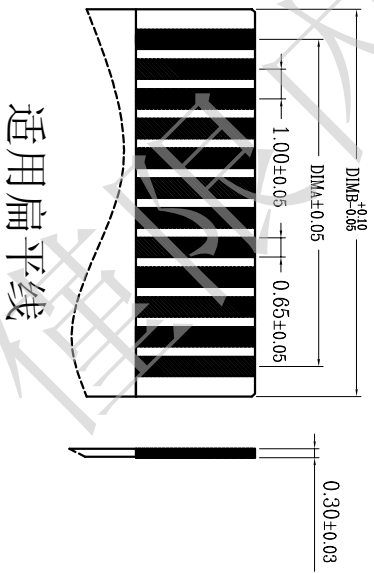

适用扁平线

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25°C~85°C.
3. 额定电压主: 50V, AC/DC(等效).
4. 接触电阻: ≤0.03Ω.
5. 绝缘电阻: ≥500MΩ

| PLX 拔数 | DIMA  | DIMB  | DIMC  |
|--------|-------|-------|-------|
| 1      | 3.00  | 5.03  | 11.00 |
| 5      | 4.00  | 6.03  | 12.00 |
| 6      | 5.00  | 7.03  | 13.00 |
| 7      | 6.00  | 8.03  | 14.00 |
| 8      | 7.00  | 9.03  | 15.00 |
| 9      | 8.00  | 10.03 | 16.00 |
| 10     | 9.00  | 11.03 | 17.00 |
| 11     | 10.00 | 12.03 | 18.00 |
| 12     | 11.00 | 13.03 | 19.00 |
| 13     | 12.00 | 14.03 | 20.00 |
| 14     | 13.00 | 15.03 | 21.00 |
| 15     | 14.00 | 16.03 | 22.00 |
| 16     | 15.00 | 17.03 | 23.00 |
| 17     | 16.00 | 18.03 | 24.00 |
| 18     | 17.00 | 19.03 | 25.00 |
| 19     | 18.00 | 20.03 | 26.00 |
| 20     | 19.00 | 21.03 | 27.00 |
| 21     | 20.00 | 22.03 | 28.00 |
| 22     | 21.00 | 23.03 | 29.00 |
| 23     | 22.00 | 24.03 | 30.00 |
| 24     | 23.00 | 25.03 | 31.00 |
| 25     | 24.00 | 26.03 | 32.00 |
| 26     | 25.00 | 27.03 | 33.00 |
| 27     | 26.00 | 28.03 | 34.00 |
| 28     | 27.00 | 29.03 | 35.00 |
| 29     | 28.00 | 30.03 | 36.00 |
| 30     | 29.00 | 31.03 | 37.00 |
| 31     | 30.00 | 32.03 | 38.00 |
| 32     | 31.00 | 33.03 | 39.00 |
| 33     | 32.00 | 34.03 | 40.00 |
| 34     | 33.00 | 35.03 | 41.00 |
| 35     | 34.00 | 36.03 | 42.00 |
| 36     | 35.00 | 37.03 | 43.00 |
| 37     | 36.00 | 38.03 | 44.00 |
| 38     | 37.00 | 39.03 | 45.00 |
| 39     | 38.00 | 40.03 | 46.00 |
| 40     | 39.00 | 41.03 | 47.00 |

山谷道 深圳市山谷道电子有限公司

品名 (ITEM) 1.0 Pitch K型立式正副位  
制图 (DRA) 王涛  
校对 (CHECK) 吴鹏  
审核 (APPRO) 黄志明

料号 (DRAWING) SGD1025-\*\*-P-LTZJ  
张数 (SHEET) 1  
比例 (SCALE) 1:1  
单位 (UNIT) mm  
日期 (DATE) 1 OF 1

一般公差 (TOLERANCE)  
X ±0.50 XX ±1.00  
ANGLES 31°

