


ASSEMBLY

Electrical:
 Vlotag Rating: 50V AC(rms) /DC
 Current Rating: 0.5A AC(rms) /DC
 Contact Resistance: 50mΩ Max
 Insulation Resistance: 500MΩ min
 Dielectric Withstanding Voltage: 200V AC r.m.s
 Operating Temperature: -40°C~+105°C
 Materials
 Housing: High Temperature Plastic
 UL94V-0
 Terminal: Copper Alloy
 Material: LCP NC
 Contact: phosphor Bronze, Gold Plating

Ordering Information


SGD-08-M - XXXP-H46 -G1 1 0

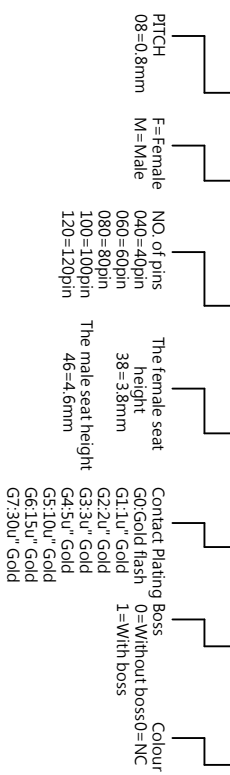

Contacts	Dimension (mm)				
	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
40	21.90	20.35	19.05	20.20	15.20
60	29.90	28.35	27.05	28.20	23.20
80	37.90	36.35	35.05	36.20	31.20
100	45.90	44.35	43.05	44.20	39.20
120	53.90	52.35	51.05	52.20	47.20

单位	M M	尺寸公差	
		±0.05	±0.10
日期	14.08.30	±0.0	±0.10
比例	1:1	±0.0	±0.20
制图		角度公差	
校对		±1°	±0.5°
审核		±0.0	±0.5°

PCB LAYOUT

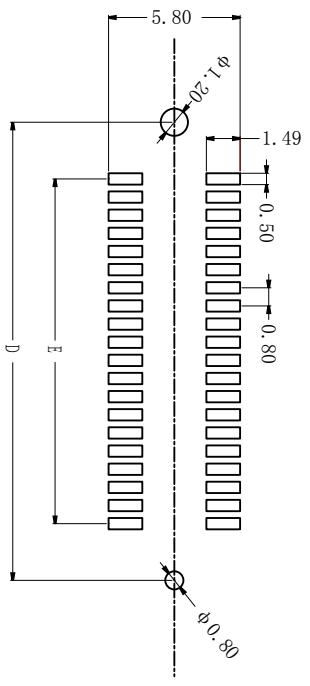

山谷道 深圳市山谷道电子有限公司

单位	M M	尺寸公差
日期	14.08.30	±0.05
比例	1:1	±0.10
制图		±0.0
校对		±1°
审核		±0.5°

料号	品名	包装规格
SGD-08-M-***P-H46-G110	单槽0.8mm板对板 公座 H4.6 立贴	卷带1000PCS/R

xx001