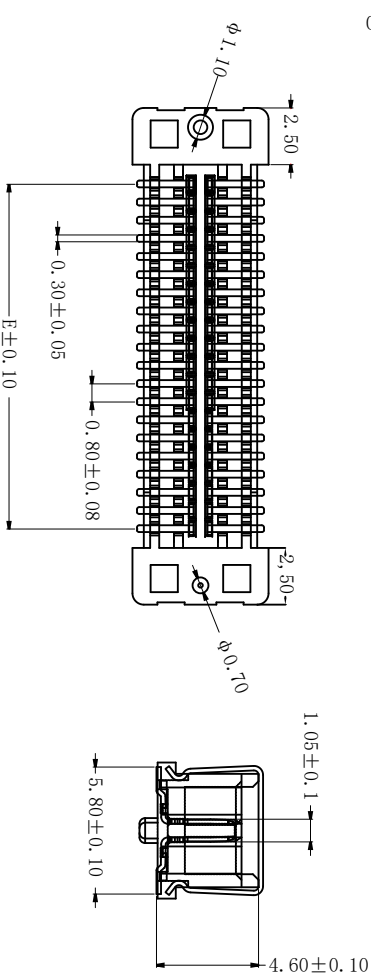
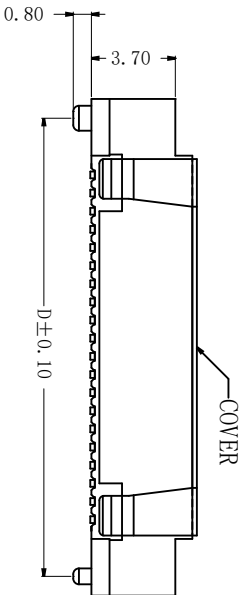
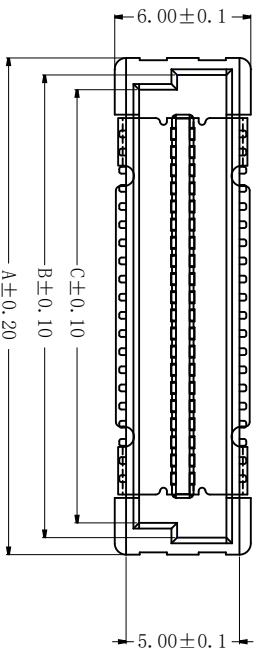


ASSEMBLY

Electrical:
Vlotag Rating:50V AC(rms) /DC
Current Rating:0.5A AC(rms) /DC
Contact Resistance:50mΩ Max
Insulation Resistance500MΩ min
Dielectric Withstanding Voltage:200V AC r.m.s
Operating Temperature:-40℃~+105℃
Materials
Housing:High Temperature Plastic
UL94V-0
Terminal:Copper Alloy
Material:LCP NC
Contact:phosphor Bronze, Gold Plating

Ordering Information


SGD-08-M - XXXP-H46 -G1 1 0



PITCH 08=0.8mm	F=Female M=Male	NO. of pins 040=40pin 060=60pin 080=80pin 100=100pin 120=120pin	The female seat height 38=3.8mm	Contact Plating Boss G0:Gold flash 0=Without boss=NC G1:1u" Gold 1=With boss G2:2u" Gold G3:3u" Gold G4:5u" Gold G5:10u" Gold G6:15u" Gold G7:30u" Gold	Colour
-------------------	--------------------	--	---------------------------------------	---	--------

Contacts	Dimension(mm)				
	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
40	21.90	20.35	19.05	20.20	15.20
60	29.90	28.35	27.05	28.20	23.20
80	37.90	36.35	35.05	36.20	31.20
100	45.90	44.35	43.05	44.20	39.20
120	53.90	52.35	51.05	52.20	47.20




单位	M M	尺寸公差	山谷道 深圳市山谷道电子有限公司
日期	14.08.30	±0.05 ±0.10 ±0.20	
比例	1:1	角度公差 ±1° ±0.5°	
制图		版本 A	
校对		倒角	包装规格
审核			卷带1000PCS/R

PC.B LAYOUT

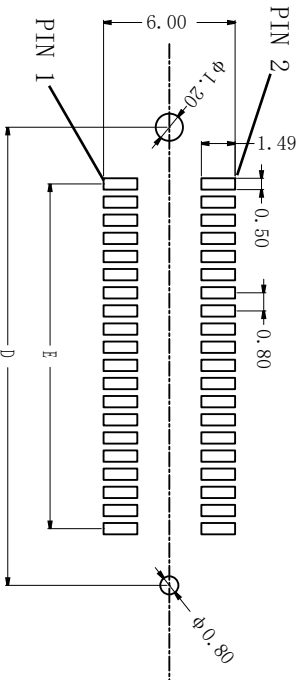

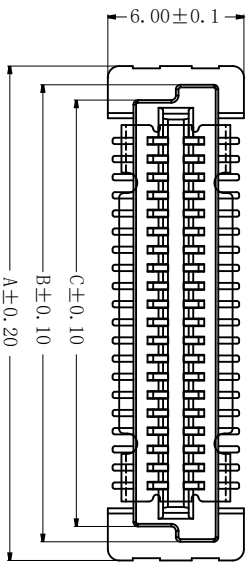


ASSEMBLY

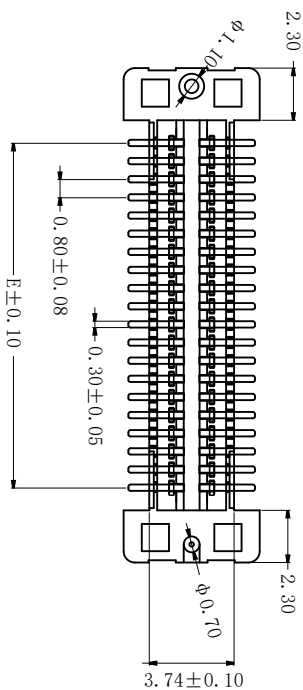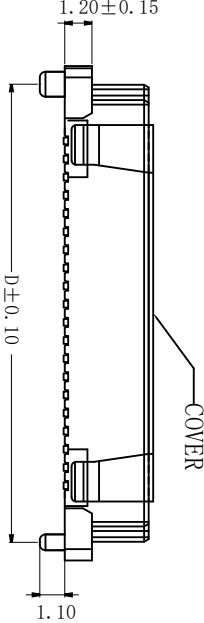

Electrical:
Vlotag Rating: 50V AC(rms) /DC
Current Rating: 0. 5A AC(rms) /DC
Contact Resistance: 50mΩ Max
Insulation Resistance: 500MΩ min
Dielectric Withstanding Voltage: 200V AC r. m. s
Operating Temperature: - 40℃~+105℃
Material: s
Housing: High Temperature Plastic
UL94V-0
Terminal: Copper Alloy
Material: LCP NC
Contact: phosphor Bronze, Gold Plating

Ordering Information

SGD-08-F - XXXP-H38 -G1 1 0

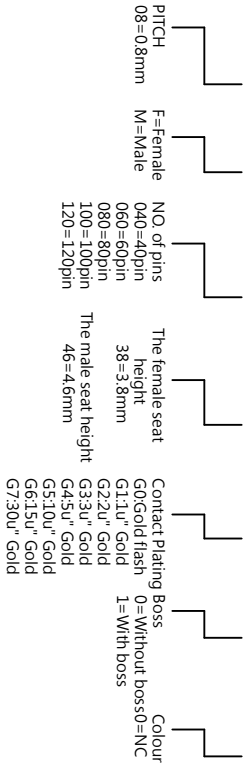

Dimension (mm)					
Contacts	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
40	21. 90	20. 20	18. 80	20. 20	15. 20
60	29. 90	28. 20	26. 80	28. 20	23. 20
80	37. 90	36. 20	34. 80	36. 20	31. 20
100	45. 90	44. 20	42. 80	44. 20	39. 20
120	53. 90	52. 20	50. 80	52. 20	47. 20

单位	M	M	尺寸公差		料号			
日期	14. 08. 30		±0. 05	±0. 10				
比例	1: 1		±0. 05	±0. 10	SGD-08-F-***P-H38-G110			
定制			±0. 05	±0. 10				
校对			±0. 05	±0. 10	单槽0. 8mm板对板 母座 H3. 8 立贴			
审核			±0. 05	±0. 10				
倒角			±0. 05	±0. 10	卷带1000PCS/R			
			±0. 05	±0. 10				
包装规格			±0. 05	±0. 10	xx001			
			±0. 05	±0. 10				