
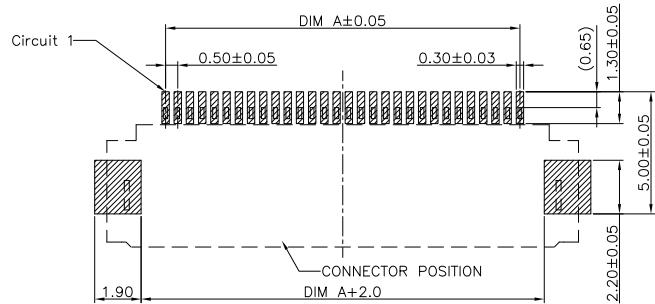
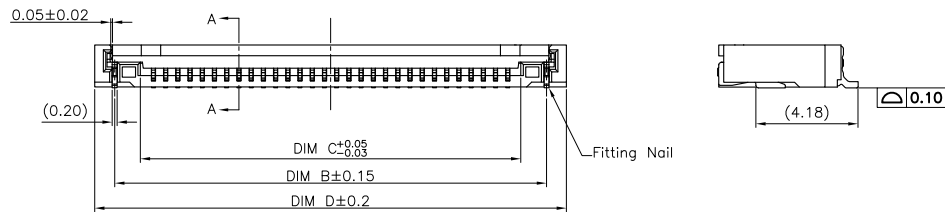


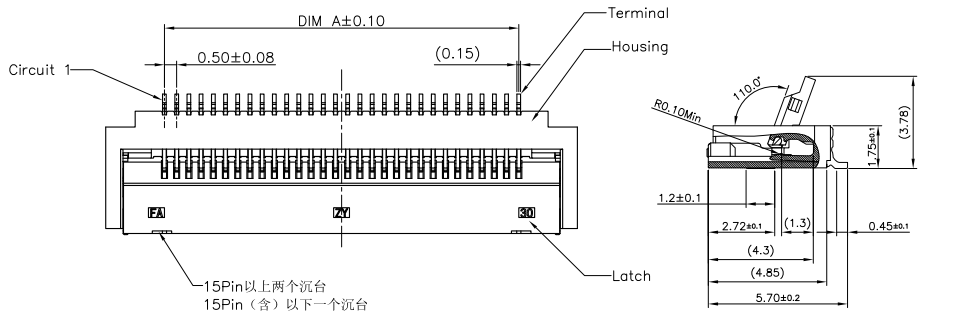

RECOMMENDED P.C.B. PATTERN LAYOUT
GENERAL TOLERANCE ±0.05

Note:

1. Material:

- 1.1 Housing: thermoplastic high temp.UL94V-0;
- 1.2 Latch: thermoplastic high temp.UL94V-0;
- 1.3 Terminal: copper alloy.
- 1.4 Fitting Nail: copper alloy.

2. Finish:

2.1 Terminal:

- 50~100u" Nickel under plating over all
- I:Gold flash on contact and solder area.
- K:3u" Gold on contact and Gold Flash on Solder
- M:5u" Gold on contact and Gold Flash on Solder
- S:15u" Gold on contact and Gold Flash on Solder

2.2 Fitting Nail:

- 50~100u" Nickel under plating over all
- 80~150u" Matte-Tin over all.

3. Product must comply HF RoHS specification.

4. Product No:

AFC79-S

CKTS

CONTACTS TYPE

F:Lower

PLATING

I:Gold flash

K:3u" Au

M:5u" Au

S:15u" Au

**

F

I

A

-

HF

REMARKS

HF:Housing


Natural

Latch

Black

PACKING

A:Tape&Reel

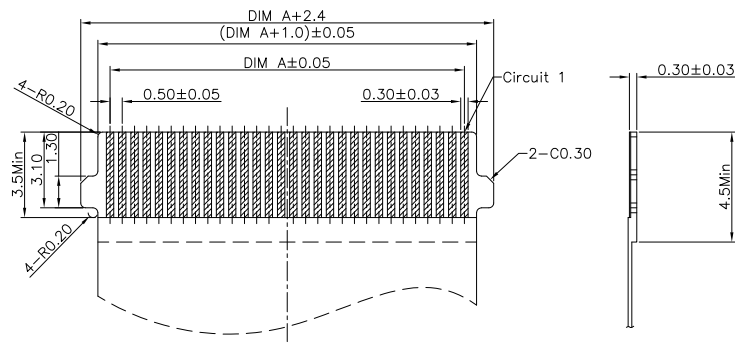

RECOMMENDED FPC/FFC DIMENSION
GENERAL TOLERANCE ±0.05

CUSTOMER DRAWING

Tolerance Unspecified (未注公差)	Size(图幅): A4
0.0 ±0.15 0° ±5°	Unit(单位): MM
0.00 ±0.10 0° 0° ±3°	Scale(比例): 1:1
0.000 ±0.05 0° 0° ±1°	Project View (投影视角)
	Page(页数): 1 OF 1
	Rev(版本): A

山谷道 深圳市山谷道电子有限公司

Product Name(产品名称):
0.5Pitch H=1.75 R/A B/C SMT TYPE 5 FPC/FFC CONNECTOR

Product No(产品料号):
AFC79-S**F1A-HF

Designer(设计):
吴小光

Checked(审核):
Approved(核准):

Rev 版本	初版发行 变更内容	2019/09/24 日期	吴小光 制/修订人
-----------	--------------	------------------	--------------

