

Female Header

Pitch:1.00mm


Series
252

sgdconn

[Http://www.sgdconn.com](http://www.sgdconn.com)

Dual Row

W/P S.M.TType Base 2.00H

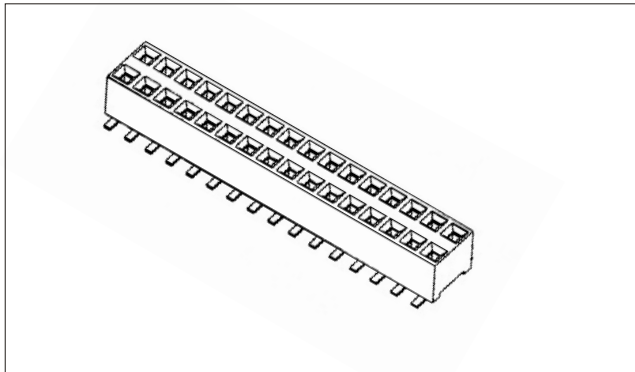

SPECIFICATIONS:

Current Rating: 1.0 AMP

Contact Resistance: 30m• Max

Insulation Resistance: 500M• Min

Withstand Voltage: 200VAC/minute

Operation Temperature: -40℃ to +105℃






MATERIALS:

Contact Material: Copper Alloy

Contact Plating: Gold or Tin over 50μ "Ni

Insulator Material: Polyester(UL94V-0)

Standard: PA6T

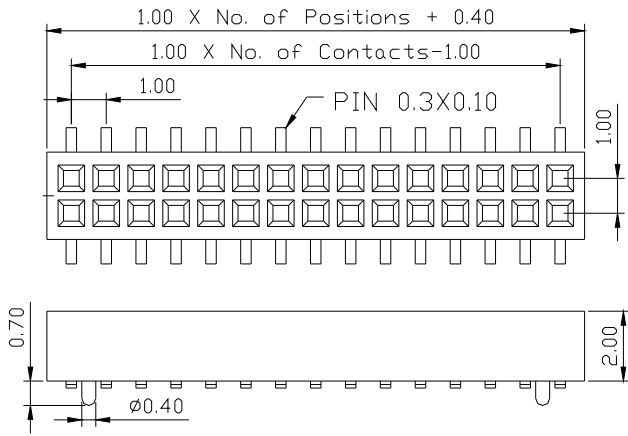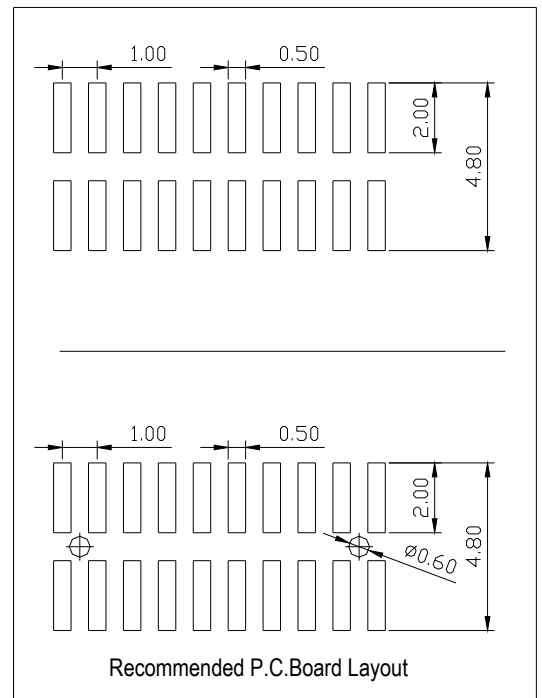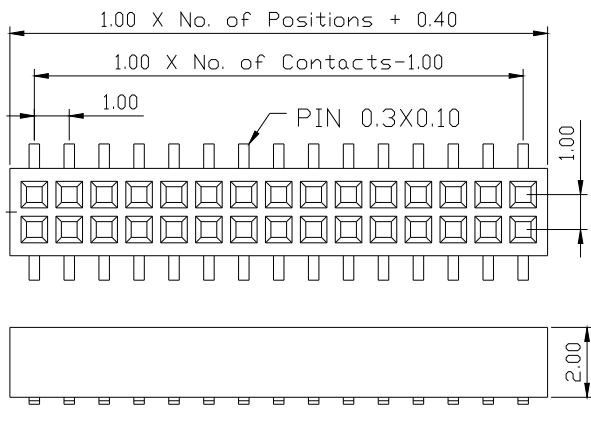

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
2 5 2 2 XX M 1 4 1 0

① Series No.:
2= Female Header

③ Insulator Height:
2 = 2.0mm

② Pitch: 5= 1.00mm

④ Dip Spacing:
1=Single row
2=Double row

⑤ Number of Contacts:
Single row =01 to 40
Double row=02 to 80

⑥ Tail & Mounting Style:
M=Straight SMT type

⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

⑨ Color: 1=Black

⑩ Customer Request

Due to technical progress, all the information provided is subject to change without prior notice.