


Female Header
Single Row/Dual Row
Straight DIP Type

Pitch: 1.27mm

Series
232 / 233
234

sgdconn

Http://www.sgdconn.com




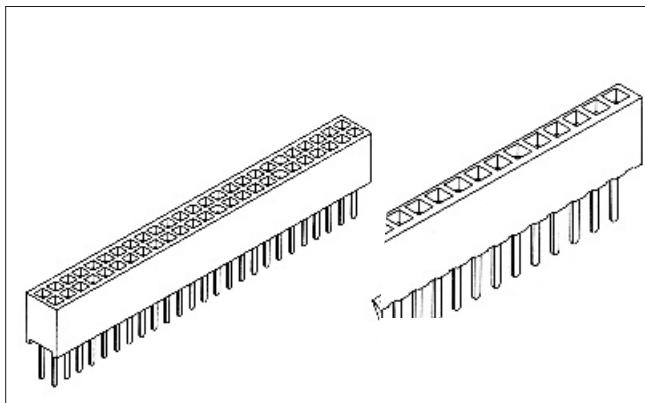


SPECIFICATIONS:

Current Rating: 1.0 AMP
Contact Resistance: 30m Ω Max
Insulation Resistance: 1000M Ω Min
Withstand Voltage: 300VAC/minute
Operation Temperature: -40°C to +105°C

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50 μ " Ni
Insulator Material: Polyester(UL94V-0)
Standard: PA6T

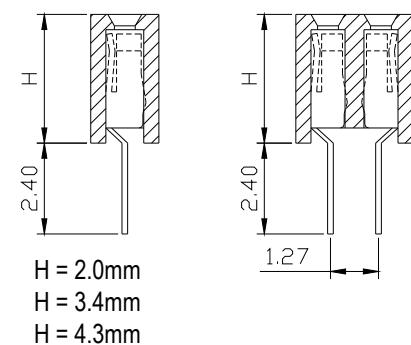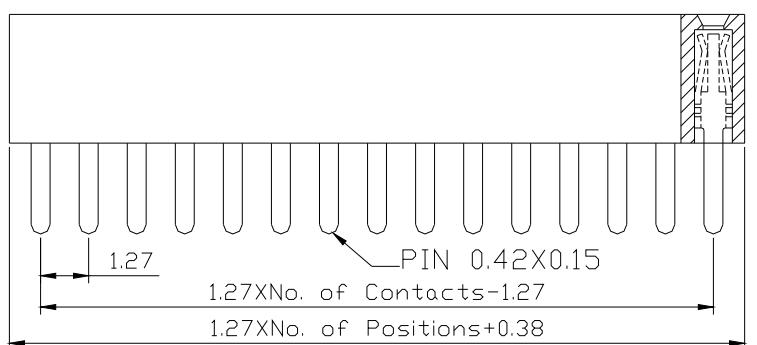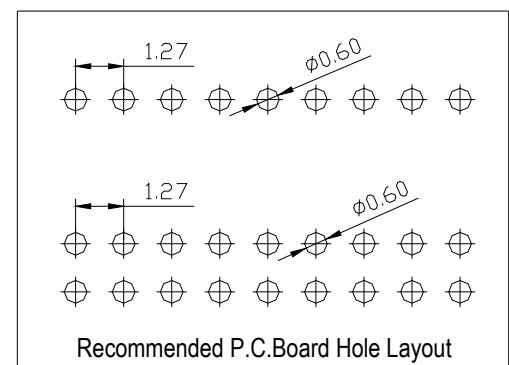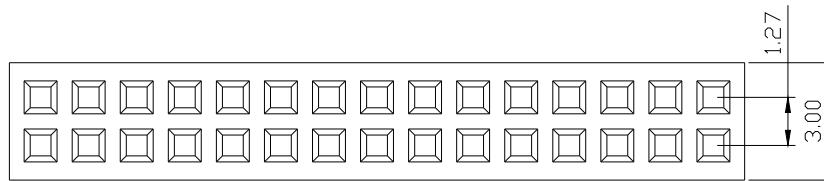

Ordering Code

①②③④⑤⑥⑦⑧⑨⑩
2 3 X X XX S 1 4 1 0

① Series No.:
2= Female Header
② Pitch: 3 = 1.27mm

③ Insulator Height:
2 = 2.0mm
3 = 3.4mm
4 = 4.3mm

④ Dip Spacing:
1=Single row
2=Double row

⑤ Number of Contacts:
Single row = 01 to 50
Double row= 02 to 100

⑥ Tail & Mounting Style:
S=Straight DIP type

⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"

3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

⑨ Color:1=Black
⑩ Customer Request