

Pin Header


Single Row/Dual Row
Straight S.M.T Type

Pitch:1.27mm

Series
331 ~ 333
335 ~ 339

sgdconn

Http://www.sgdconn.com







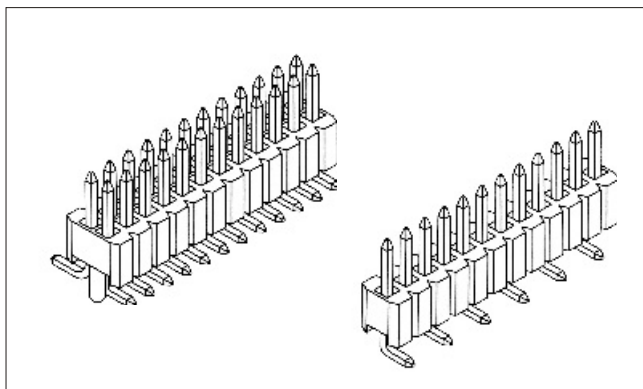


SPECIFICATIONS:

Current Rating: 1.0 AMP
Contact Resistance: 30m Ω Max
Insulation Resistance: 1000M Ω Min
Withstand Voltage: 300VAC/minute
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50 μ Ni
Insulator Material: Polyester(UL94V-0)
Standard: PA6T

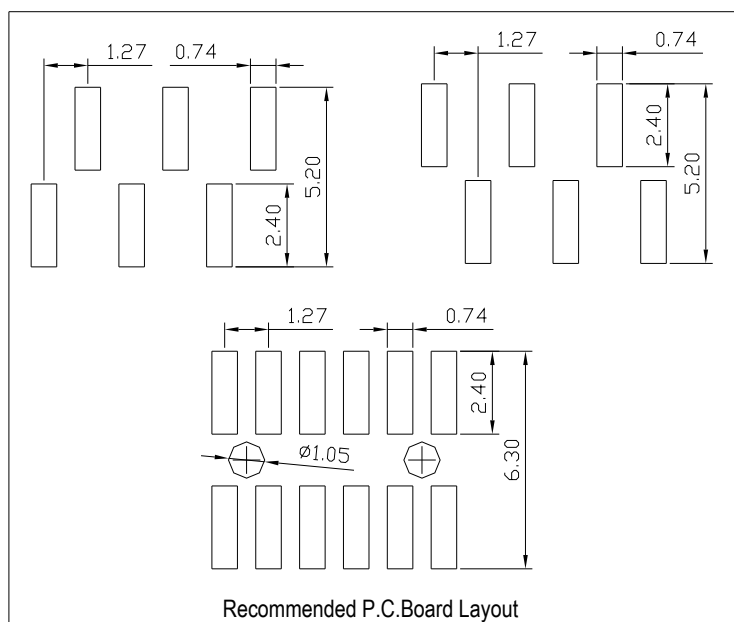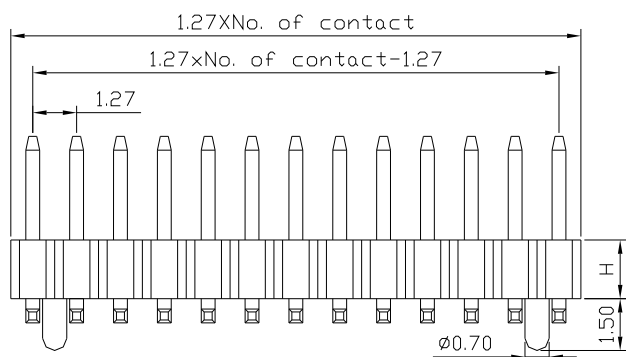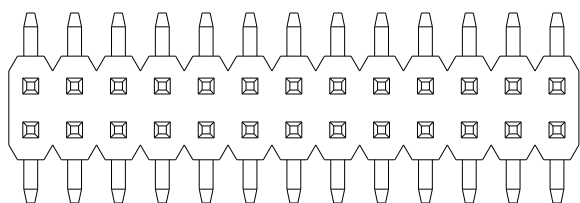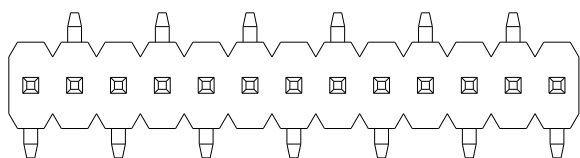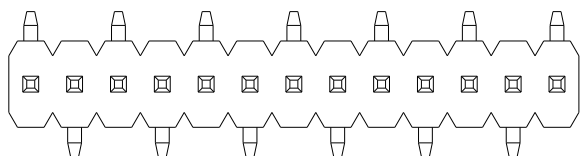

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
3 3 X X XX M 1 4 1 XXX

① Series No.:
3= Pin Header

② Pitch: 3= 1.27mm

③ Insulator Height:
1 = 1.00mm 2 = 2.00mm
3 = 2.50mm 5 = 1.50mm
6 = 1.60mm 7 = 1.70mm
8 = 0.80mm 9 = 0.65mm

④ Dip Spacing:
1=Single row
2=Double row

⑤ Number of Contacts:
Single row = 01 to 50
Double row= 02 to 100

⑥ Tail & Mounting Style:
M=Straight S.M.T type

⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

⑩ Pin Length
XXX=A+C

⑧ Material Type
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

⑨ Tiers of Body
1 = Singletier
2 = Doubletier
3 = Triple tier

Due to technical progress, all the information provided is subject to change without prior notice.