


Female Header
Single Row/Dual Row
Straight SMT Type

Pitch:1.27mm

Series
232 / 233
234

sgdconn

[Http://www.sgdconn.com](http://www.sgdconn.com)





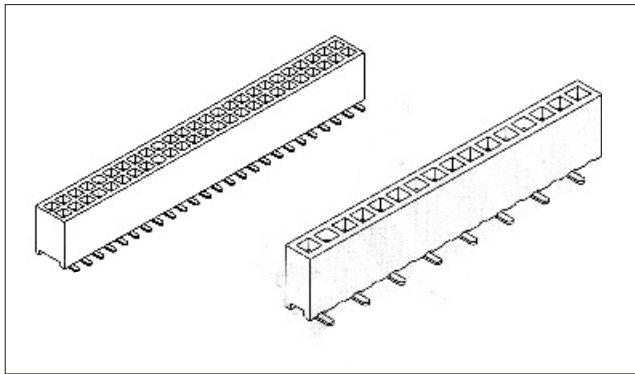


SPECIFICATIONS:

Current Rating: 1.0 AMP
Contact Resistance: 30m $\bullet$ Max
Insulation Resistance: 1000M $\bullet$ Min
Withstand Voltage: 300VAC/minute
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50 μ "Ni
Insulator Material: Polyester(UL94V-0)
Standard: PA6T

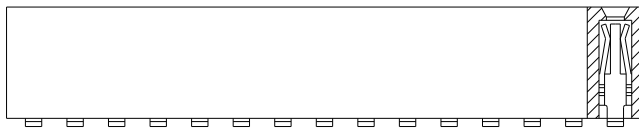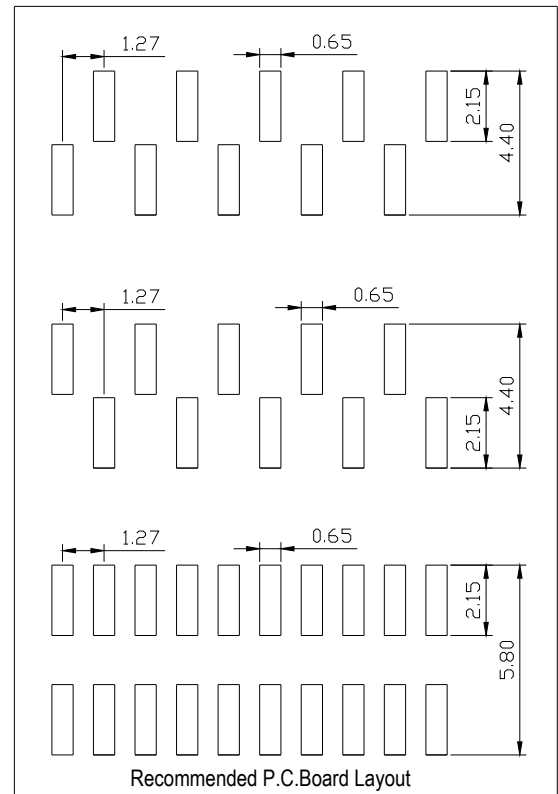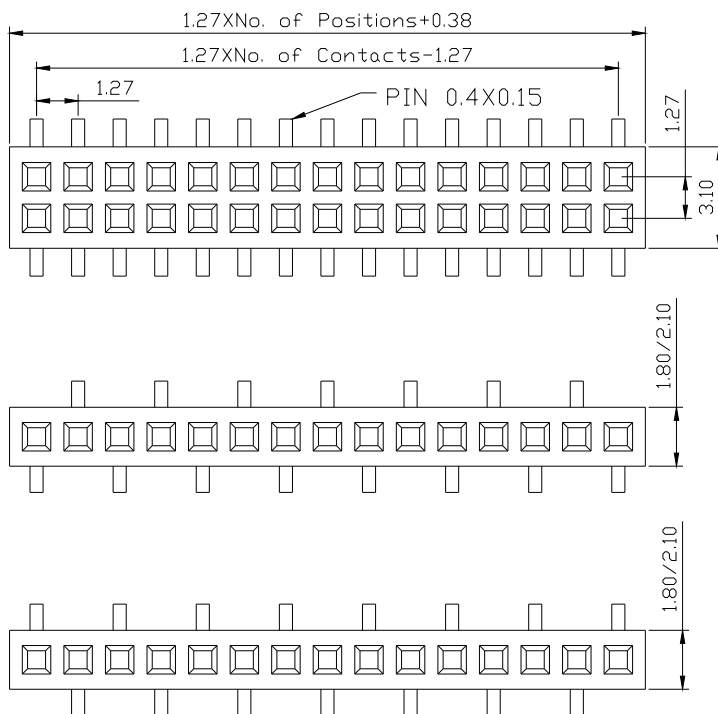

H = 2.0mm
H = 3.4mm
H = 4.3mm

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
2 3 X X XX M 1 4 1 0

① Series No.:
2= Female Header

② Pitch: 3 = 1.27mm

③ Insulator Height:
2 = 2.0mm
3 = 3.4mm
4 = 4.3mm

④ Dip Spacing:
1=Single row
2=Double row

⑤ Number of Contacts:
Single row = 01 to 50
Double row = 02 to 100

⑥ Tail & Mounting Style:
M=Straight SMT type

⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6=Gold 30u"

⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

⑨ Color: 1=Black

⑩ Customer Request

Due to technical progress, all the information provided is subject to change without prior notice.