


Straight DIP Type/Right Angle DIP Type

322 / 325









sgdconn

[Http://www.sgdconn.com](http://www.sgdconn.com)

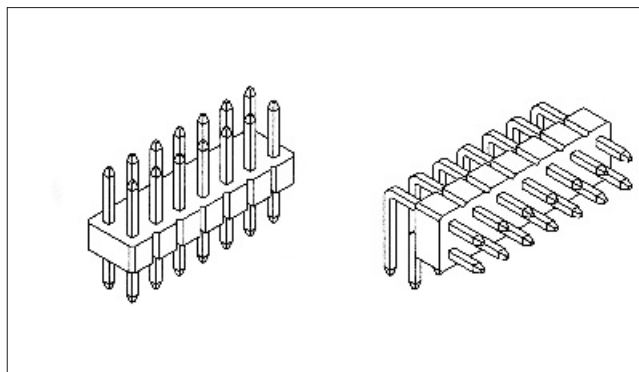

Operation Temperature: -40°C to +105°C

Standard: PA6T

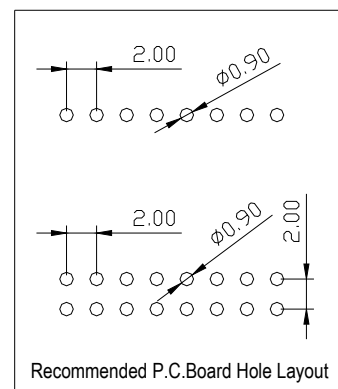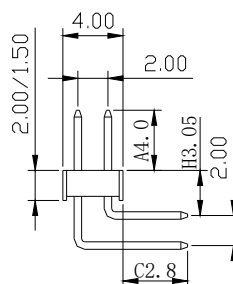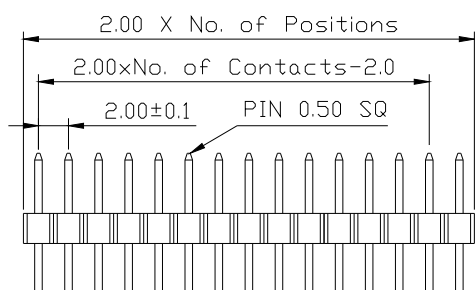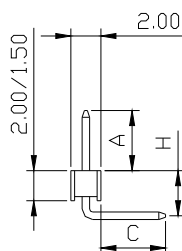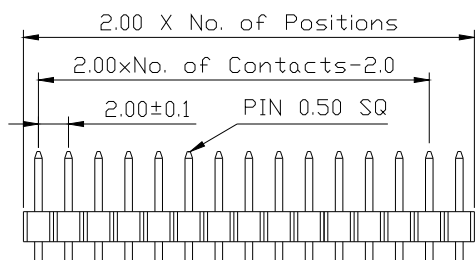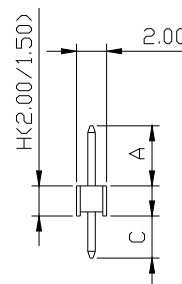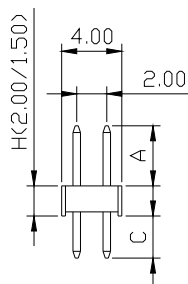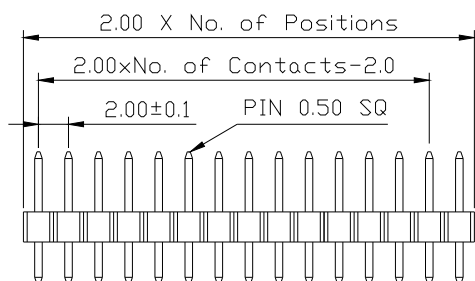

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
3 2 X X XX X 1 4 1 XXX

- ① Series No.:
3= Pin Header

- ③ Insulator Height:
2 = 2.00mm
5 = 1.50mm

- ② Pitch: $p = 2.00\text{mm}$

- ④ Dip Spacing:
1=Single row
2=Double row

- ⑤ Number of Contacts:
Single row = 01 to 40
Double row = 02 to 80

- ⑥ Tail & Mounting Style:
S=Straight DIP type
R=Right Angle DIP Type

- ⑦ Contact Plated
0= Tin 1= Gold F lash
2= Gold 3u" 3= Gold 5u"
4= Gold 10u" 5= Gold 15u"
6= Gold 30u"

- ⑧ Material Type
0=PPS 3=Nylon-66
1=PBT 4=Nylon-6T
2=LCP 5=P A46

- ⑨ Tiers of Body
1 = Single tier
2 = Double tier
3 = Triple tier

- ⑩ Pin Length
 $XXX=A+H+C$

Due to technical progress, all the information provided is subject to change without prior notice.