

Female Header


Pitch:2.54mm

Series
213-218

sgdconn

Http://www.sgdconn.com

Single Row / Dual Row
DIP/Right Angle










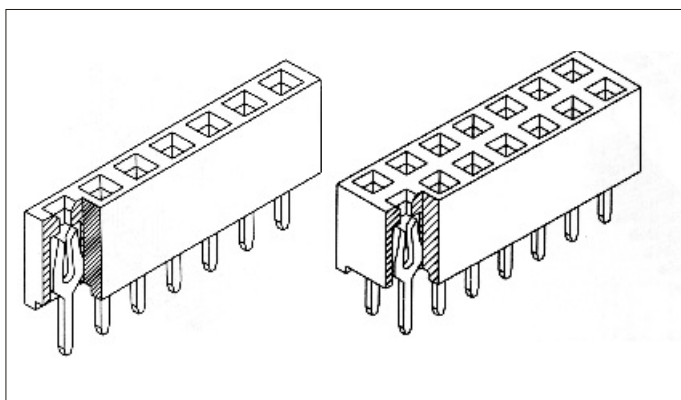


SPECIFICATIONS:

Current Rating: 3.0 AMP
Contact Resistance: 30m• Max
Insulation Resistance: 1000M• Min
Withstand Voltage: 600VAC/minute
Operation Temperature: -40℃ to +105℃

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50μ " Ni
Insulator: Glass Filled Polyester(UL94V-0)
Standard: PA6T

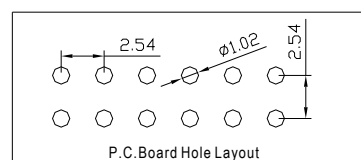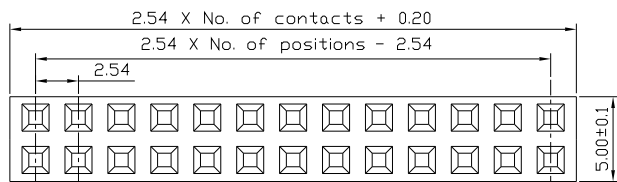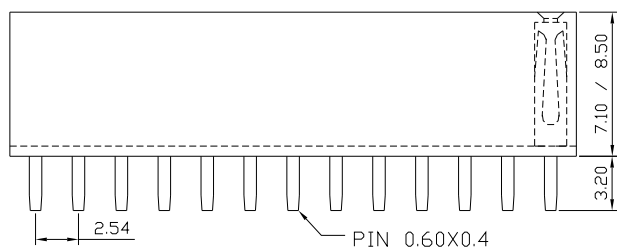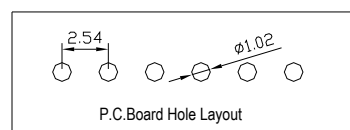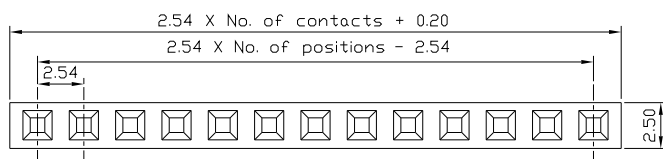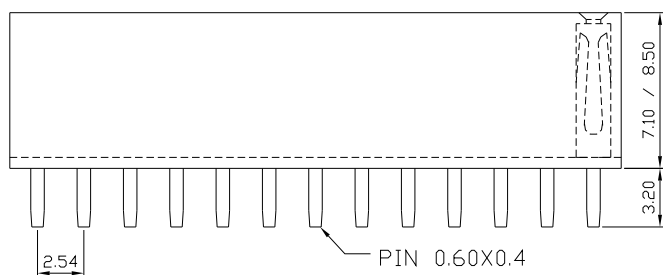

Orderin g Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
2 1 X X XX X 1 4 1 0

- ① Series No.:
2= Female Header
- ③ Insulator Height:
3=3.5mm
5=5.0mm
6=5.7mm
7=7.1mm
8=8.5mm

- ④ Dip Spacing:
1=Single row
2=Double row

- ⑤ Number of Contacts:
Single row = 01 to 40
Double row = 02 to 80

- ⑥ Tail & Mounting Style:
S=Straight DIP type
R=Right Angle Dip type

- ⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

- ⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

- ⑨ Color:1=Black
⑩ Customer Request

Due to technical progress, all the information provided is subject to change without prior notice.