


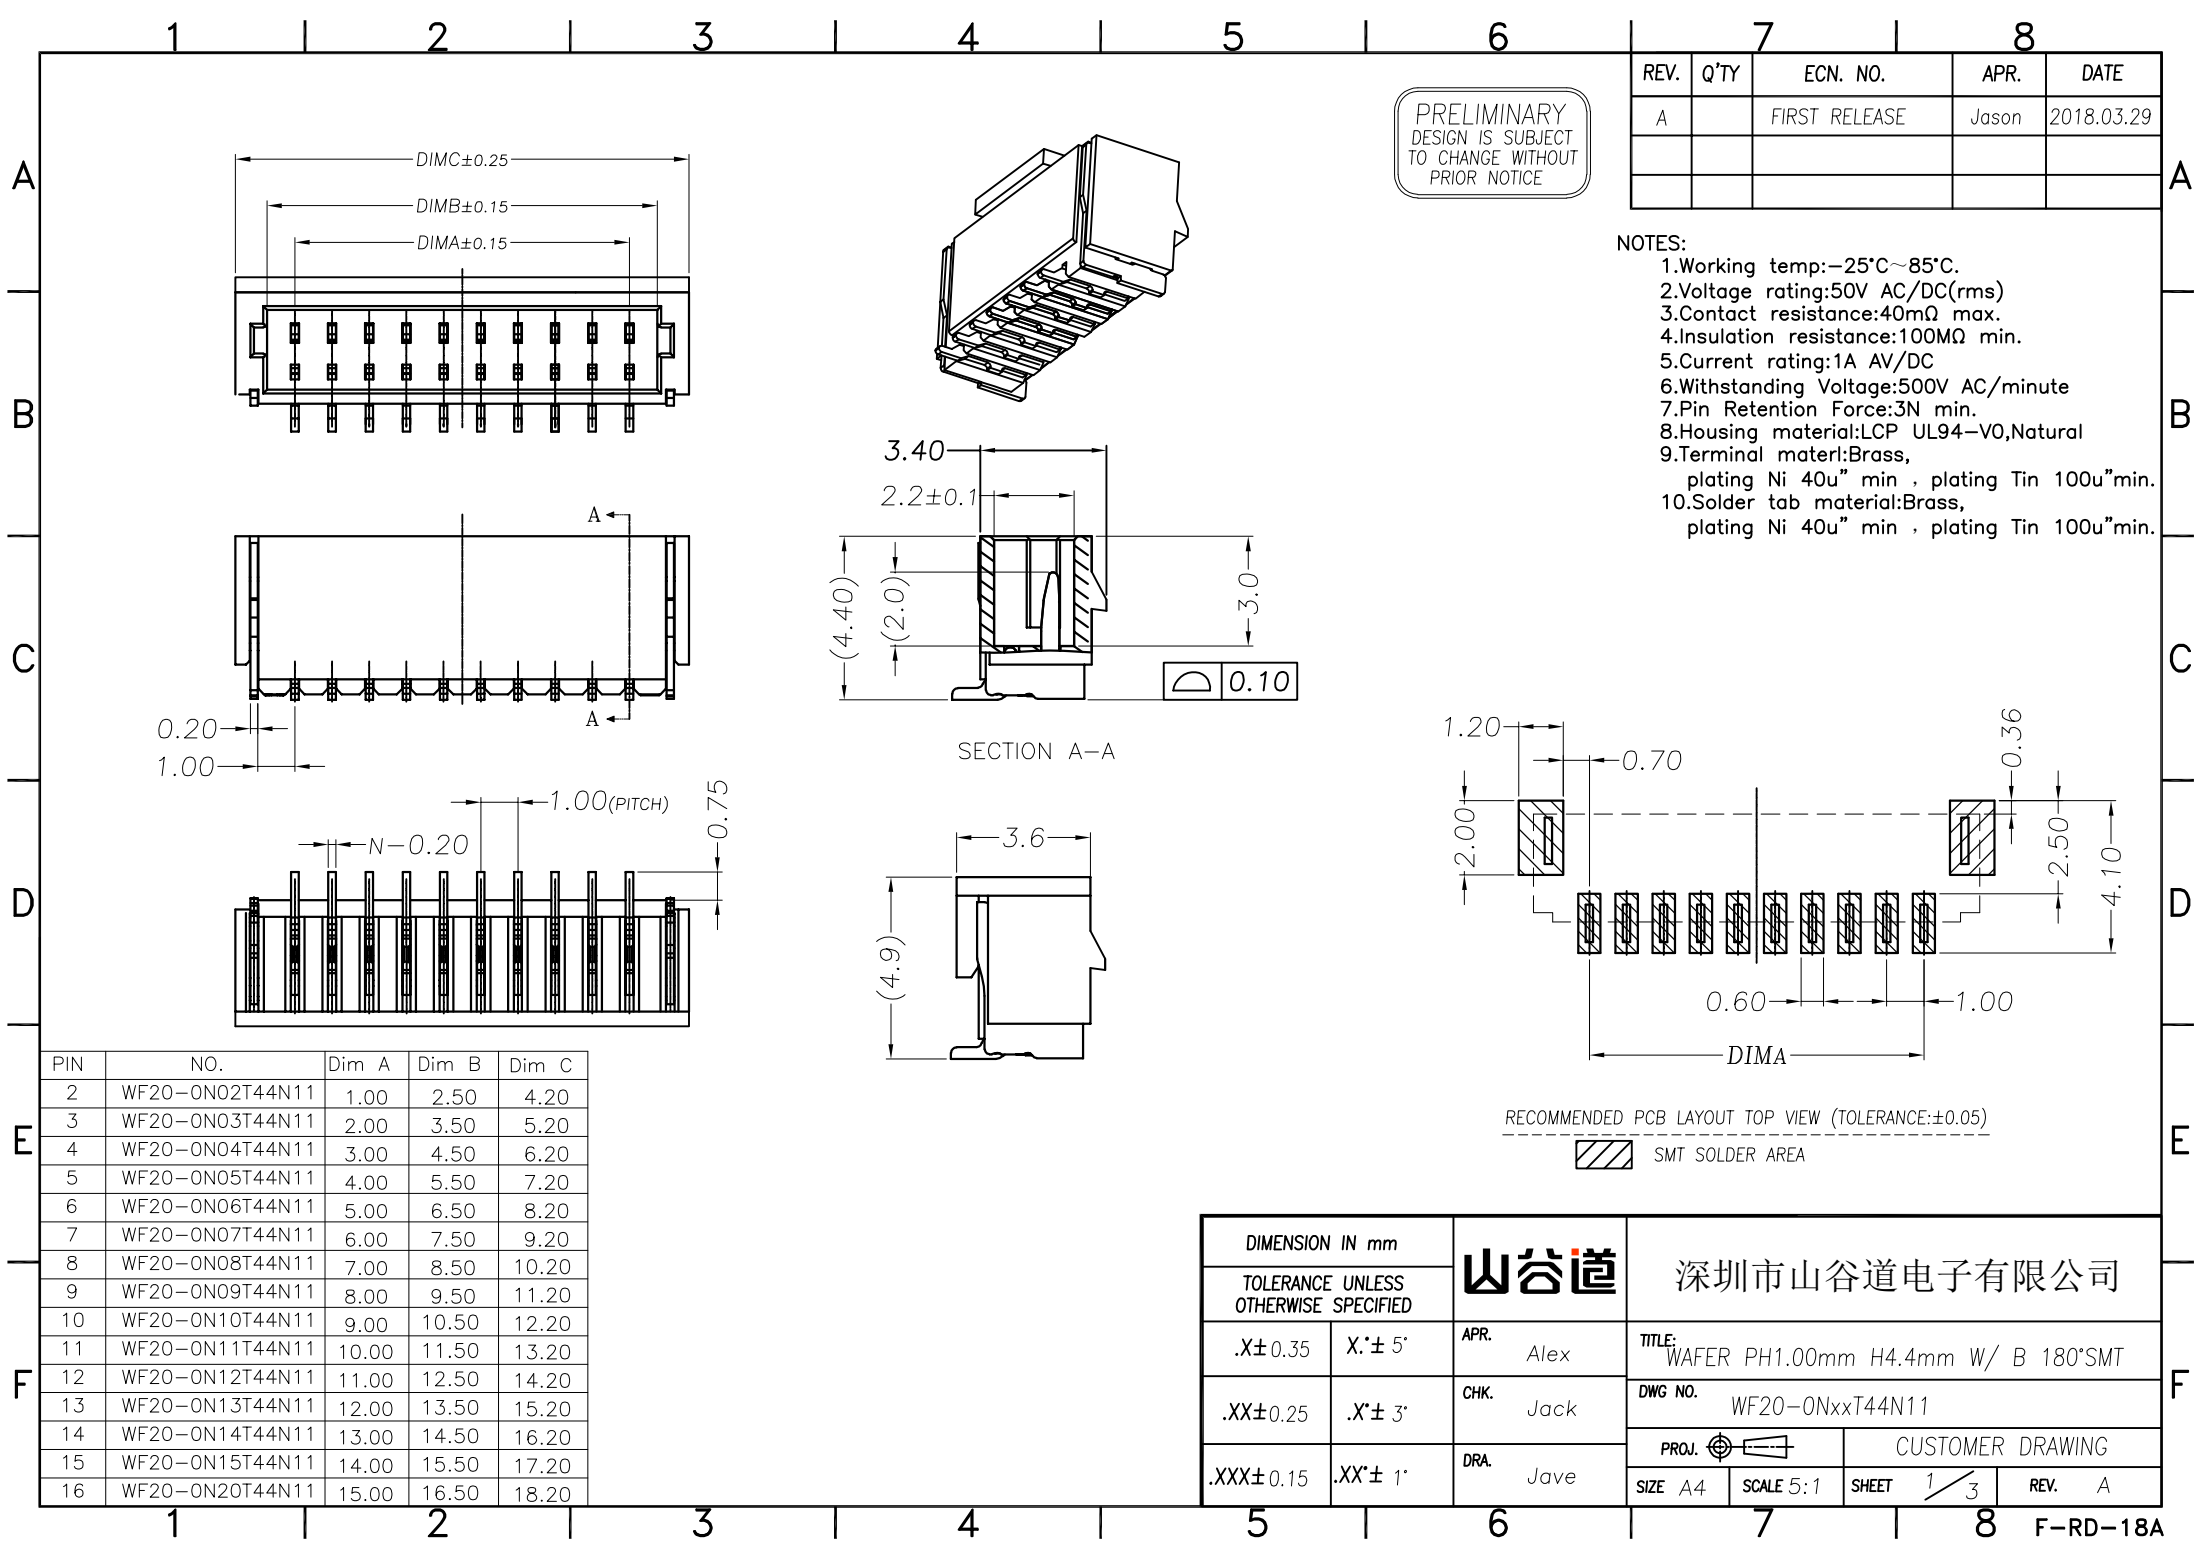


PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2018.03.29

- NOTES:
- Working temp:-25°C~85°C.
 - Voltage rating:50V AC/DC(rms)
 - Contact resistance:40mΩ max.
 - Insulation resistance:100MΩ min.
 - Current rating:1A AV/DC
 - Withstanding Voltage:500V AC/minute
 - Pin Retention Force:3N min.
 - Housing material:LCP UL94-V0,Natural
 - Terminal materl:Brass,
plating Ni 40u" min , plating Tin 100u"min.
 - Solder tab material:Brass,
plating Ni 40u" min , plating Tin 100u"min.

PIN	NO.	Dim A	Dim B	Dim C
2	WF20-0N02T44N11	1.00	2.50	4.20
3	WF20-0N03T44N11	2.00	3.50	5.20
4	WF20-0N04T44N11	3.00	4.50	6.20
5	WF20-0N05T44N11	4.00	5.50	7.20
6	WF20-0N06T44N11	5.00	6.50	8.20
7	WF20-0N07T44N11	6.00	7.50	9.20
8	WF20-0N08T44N11	7.00	8.50	10.20
9	WF20-0N09T44N11	8.00	9.50	11.20
10	WF20-0N10T44N11	9.00	10.50	12.20
11	WF20-0N11T44N11	10.00	11.50	13.20
12	WF20-0N12T44N11	11.00	12.50	14.20
13	WF20-0N13T44N11	12.00	13.50	15.20
14	WF20-0N14T44N11	13.00	14.50	16.20
15	WF20-0N15T44N11	14.00	15.50	17.20
16	WF20-0N20T44N11	15.00	16.50	18.20

DIMENSION IN mm		山谷道	深圳市山谷道电子有限公司			
TOLERANCE UNLESS OTHERWISE SPECIFIED						
.X±0.35	X.*± 5°	APR. Alex	TITLE: WAFER PH1.00mm H4.4mm W/ B 180°SMT			
.XX±0.25	.X.*± 3°	CHK. Jack	DWG NO. WF20-0NxxT44N11			
.XXX±0.15	.XX.*± 1°	DRA. Jave	PROJ. 		CUSTOMER DRAWING	
			SIZE A4	SCALE 5:1	SHEET 1/3	REV. A

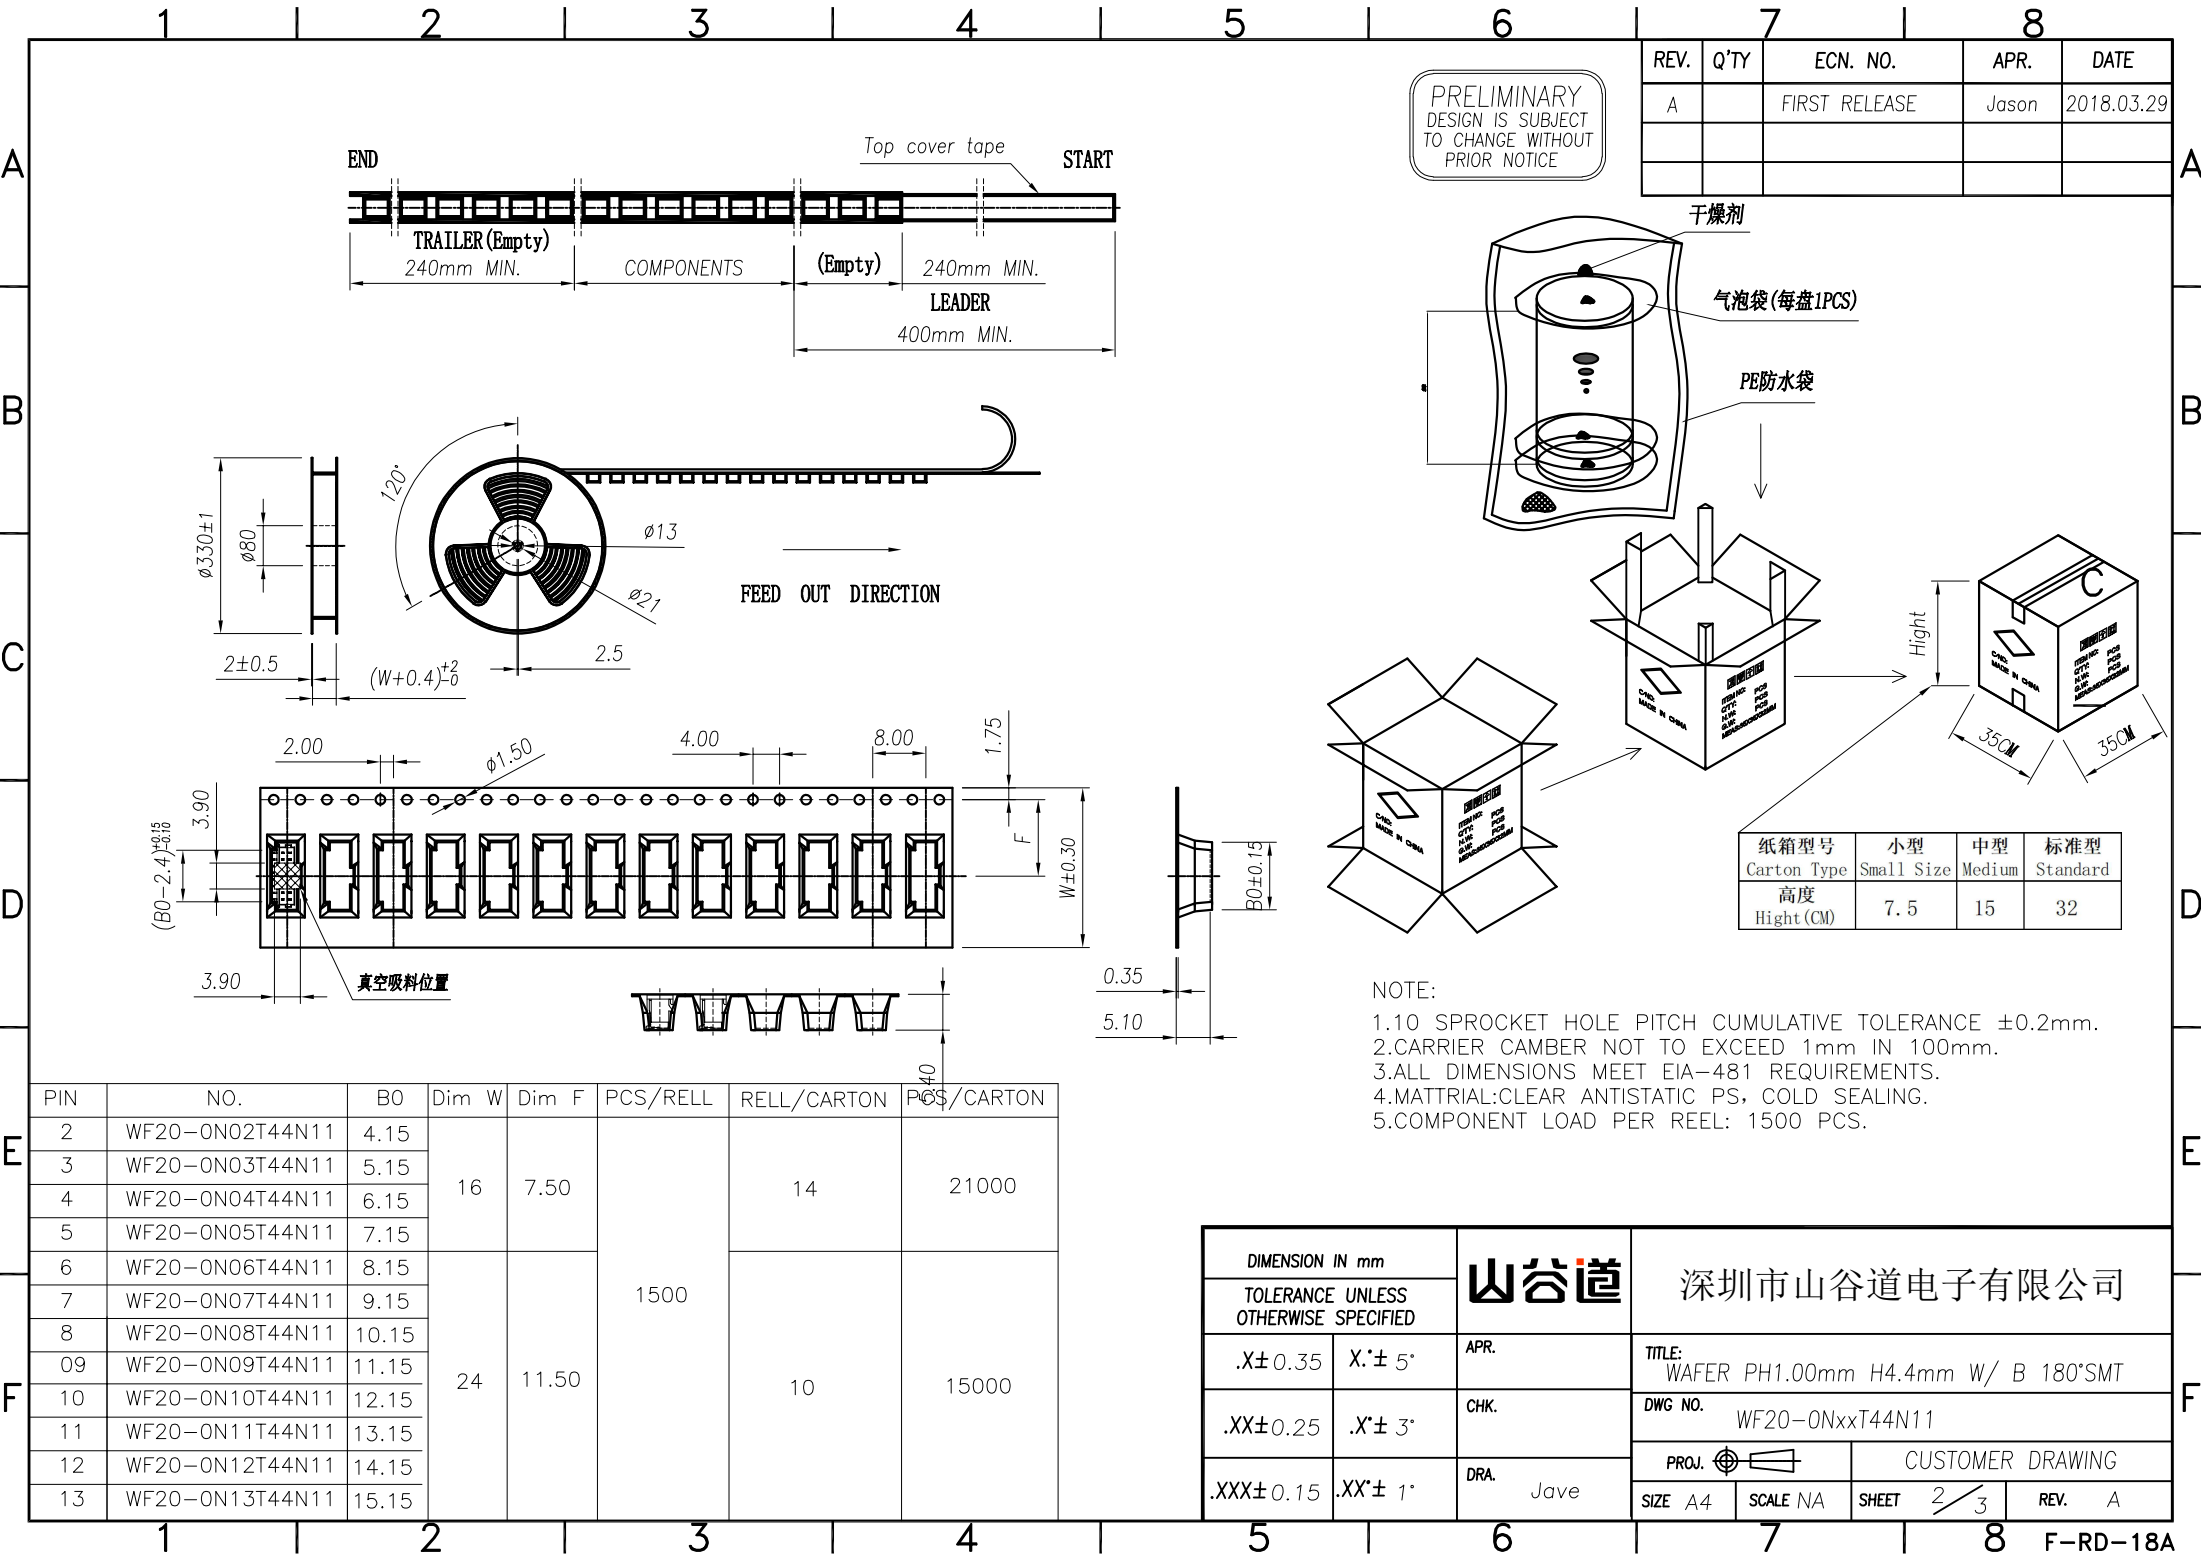

PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2018.03.29

干燥剂

气泡袋 (每盘1PCS)

PE防水袋

Height


纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

NOTE:

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
- 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
- 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
- 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
- 5.COMPONENT LOAD PER REEL: 1500 PCS.


PIN	NO.	B0	Dim W	Dim F	PCS/REEL	REEL/CARTON	PCS/CARTON
2	WF20-ON02T44N11	4.15	16	7.50	1500	14	21000
3	WF20-ON03T44N11	5.15					
4	WF20-ON04T44N11	6.15					
5	WF20-ON05T44N11	7.15					
6	WF20-ON06T44N11	8.15	24	11.50	1500	10	15000
7	WF20-ON07T44N11	9.15					
8	WF20-ON08T44N11	10.15					
09	WF20-ON09T44N11	11.15					
10	WF20-ON10T44N11	12.15					
11	WF20-ON11T44N11	13.15					
12	WF20-ON12T44N11	14.15					
13	WF20-ON13T44N11	15.15					

DIMENSION IN mm		山谷道	深圳市山谷道电子有限公司		
TOLERANCE UNLESS OTHERWISE SPECIFIED					
.X±0.35	X'± 5°	APR.	TITLE: WAFER PH1.00mm H4.4mm W/ B 180°SMT		
.XX±0.25	.X'± 3°	CHK.	DWG NO. WF20-ONxxT44N11		
.XXX±0.15	.XX'± 1°	DRA. Jave	PROJ. 		CUSTOMER DRAWING
			SIZE A4	SCALE NA	SHEET 2/3

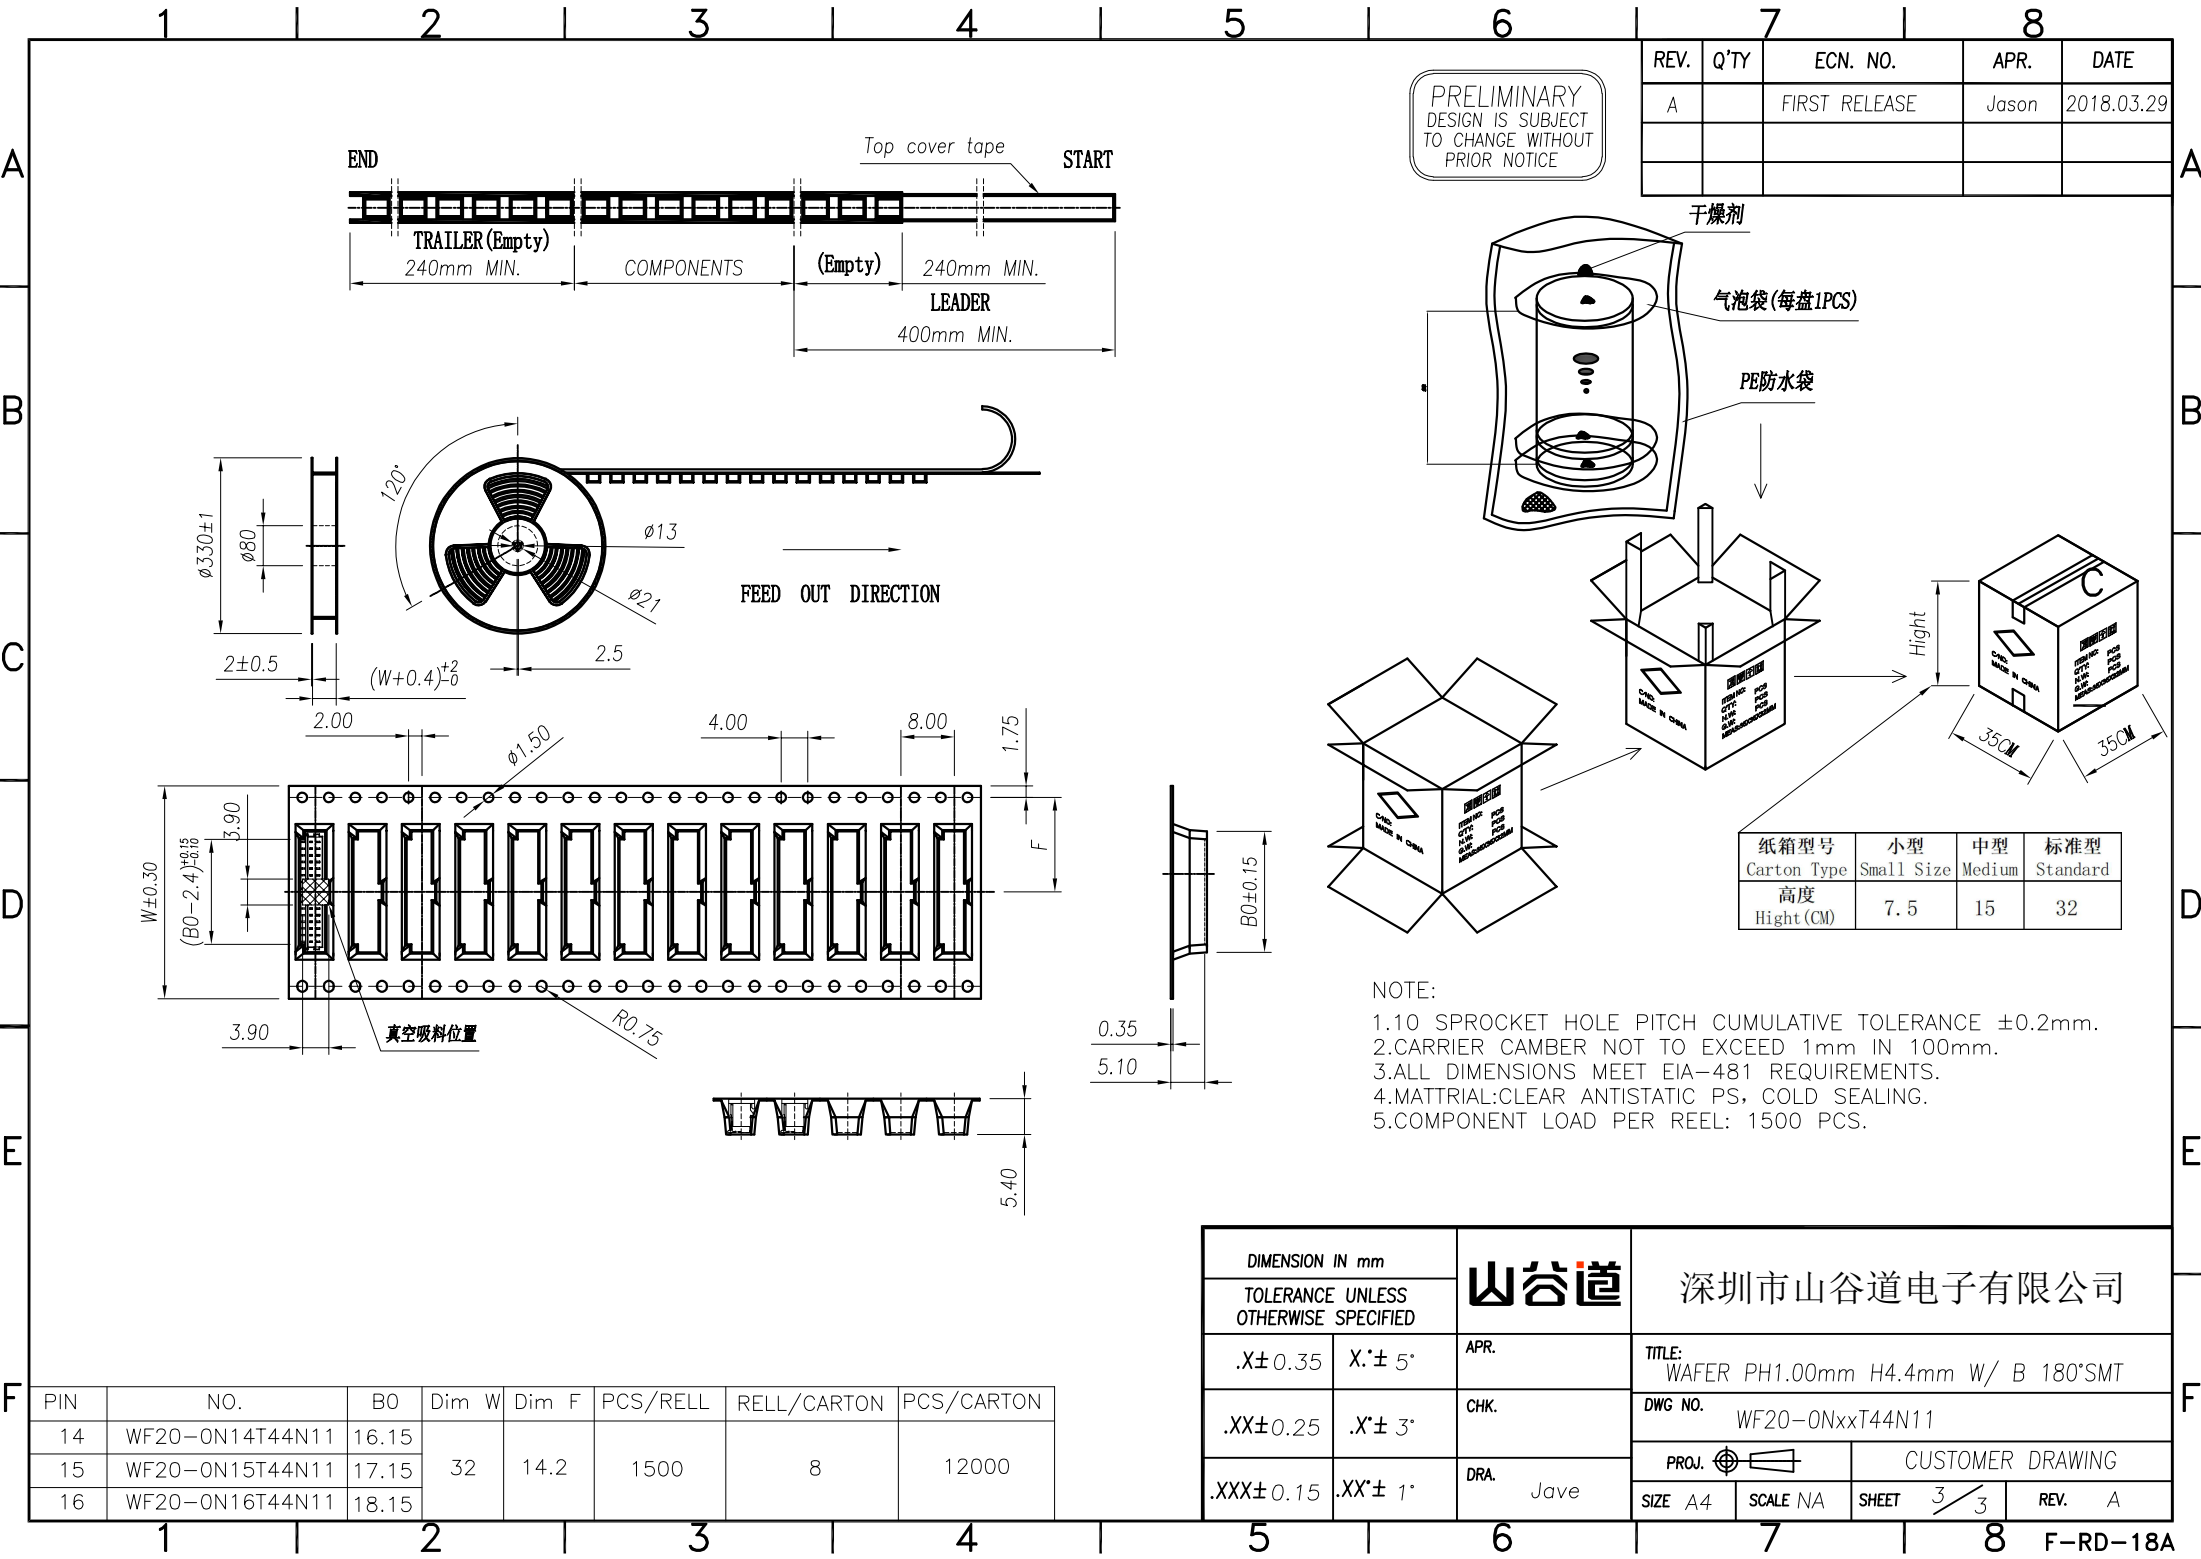

PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2018.03.29

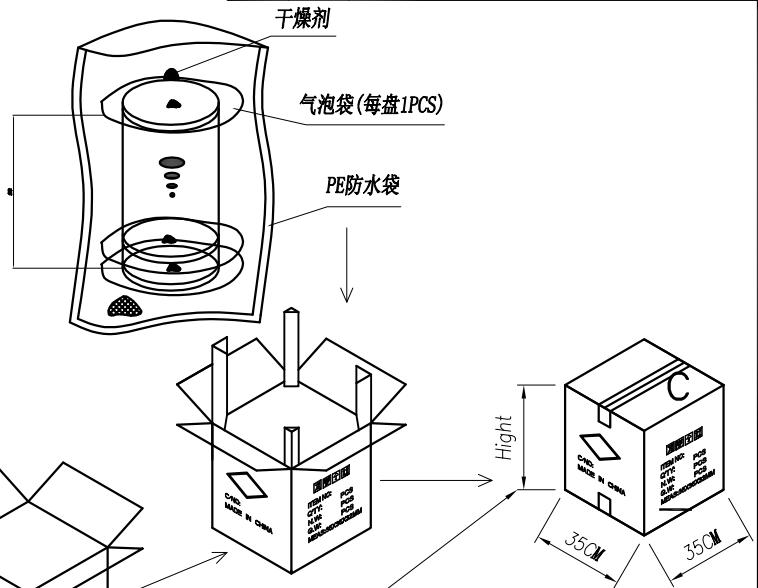

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
 - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
 - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
 - 5.COMPONENT LOAD PER REEL: 1500 PCS.

PIN	NO.	B0	Dim W	Dim F	PCS/REEL	REEL/CARTON	PCS/CARTON
14	WF20-0N14T44N11	16.15	32	14.2	1500	8	12000
15	WF20-0N15T44N11	17.15					
16	WF20-0N16T44N11	18.15					

DIMENSION IN mm		山谷道	深圳市山谷道电子有限公司			
TOLERANCE UNLESS OTHERWISE SPECIFIED						
.X±0.35	X'±5°	APR.	TITLE: WAFER PH1.00mm H4.4mm W/ B 180°SMT			
.XX±0.25	.X'±3°	CHK.	DWG NO. WF20-0NxxT44N11			
.XXX±0.15	.XX'±1°	DRA. Jave	PROJ. 		CUSTOMER DRAWING	
			SIZE A4	SCALE NA	SHEET 3/3	REV. A