


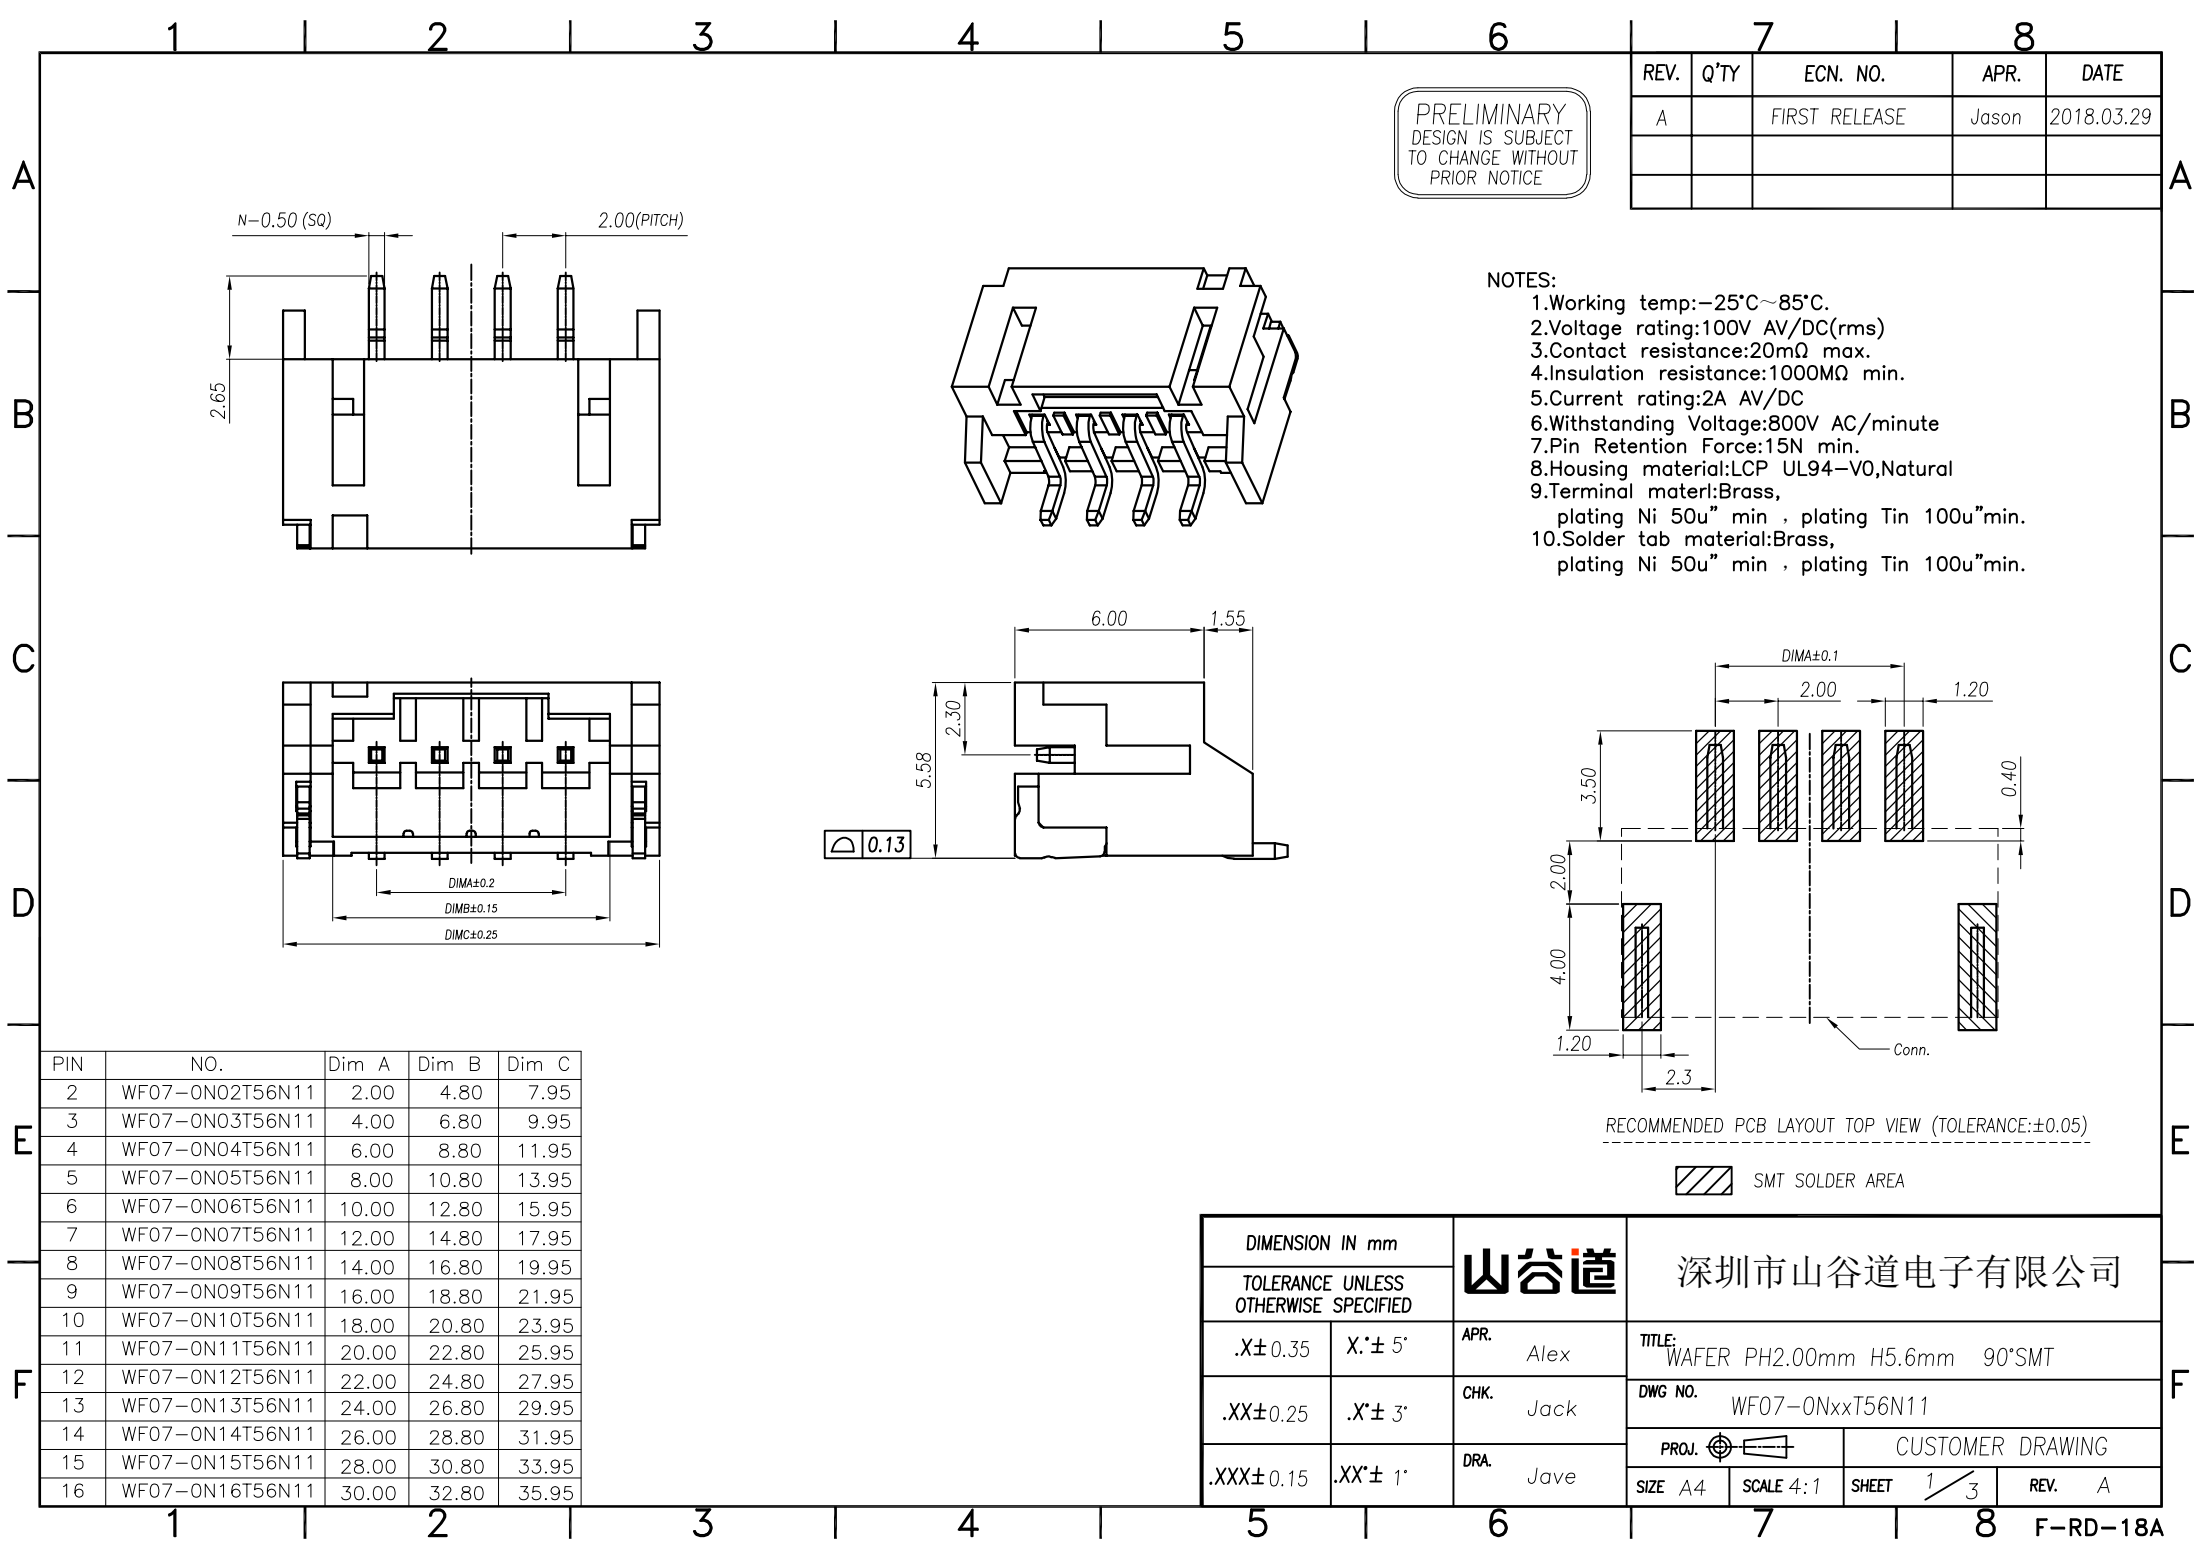


PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2018.03.29

- NOTES:
- 1.Working temp:-25°C~85°C.
 - 2.Voltage rating:100V AV/DC(rms)
 - 3.Contact resistance:20mΩ max.
 - 4.Insulation resistance:1000MΩ min.
 - 5.Current rating:2A AV/DC
 - 6.Withstanding Voltage:800V AC/minute
 - 7.Pin Retention Force:15N min.
 - 8.Housing material:LCP UL94-V0,Natural
 - 9.Terminal mater:Brass,
plating Ni 50u" min , plating Tin 100u"min.
 - 10.Solder tab material:Brass,
plating Ni 50u" min , plating Tin 100u"min.

DIMENSION IN mm		山谷道	深圳市山谷道电子有限公司			
TOLERANCE UNLESS OTHERWISE SPECIFIED						
.X±0.35	X.*± 5°	APR. Alex	TITLE: WAFER PH2.00mm H5.6mm 90°SMT			
.XX±0.25	.X.*± 3°	CHK. Jack	DWG NO. WF07-0NxxT56N11			
.XXX±0.15	.XX.*± 1°	DRA. Jave	PROJ. 		CUSTOMER DRAWING	
			SIZE A4	SCALE 4:1	SHEET 1/3	REV. A

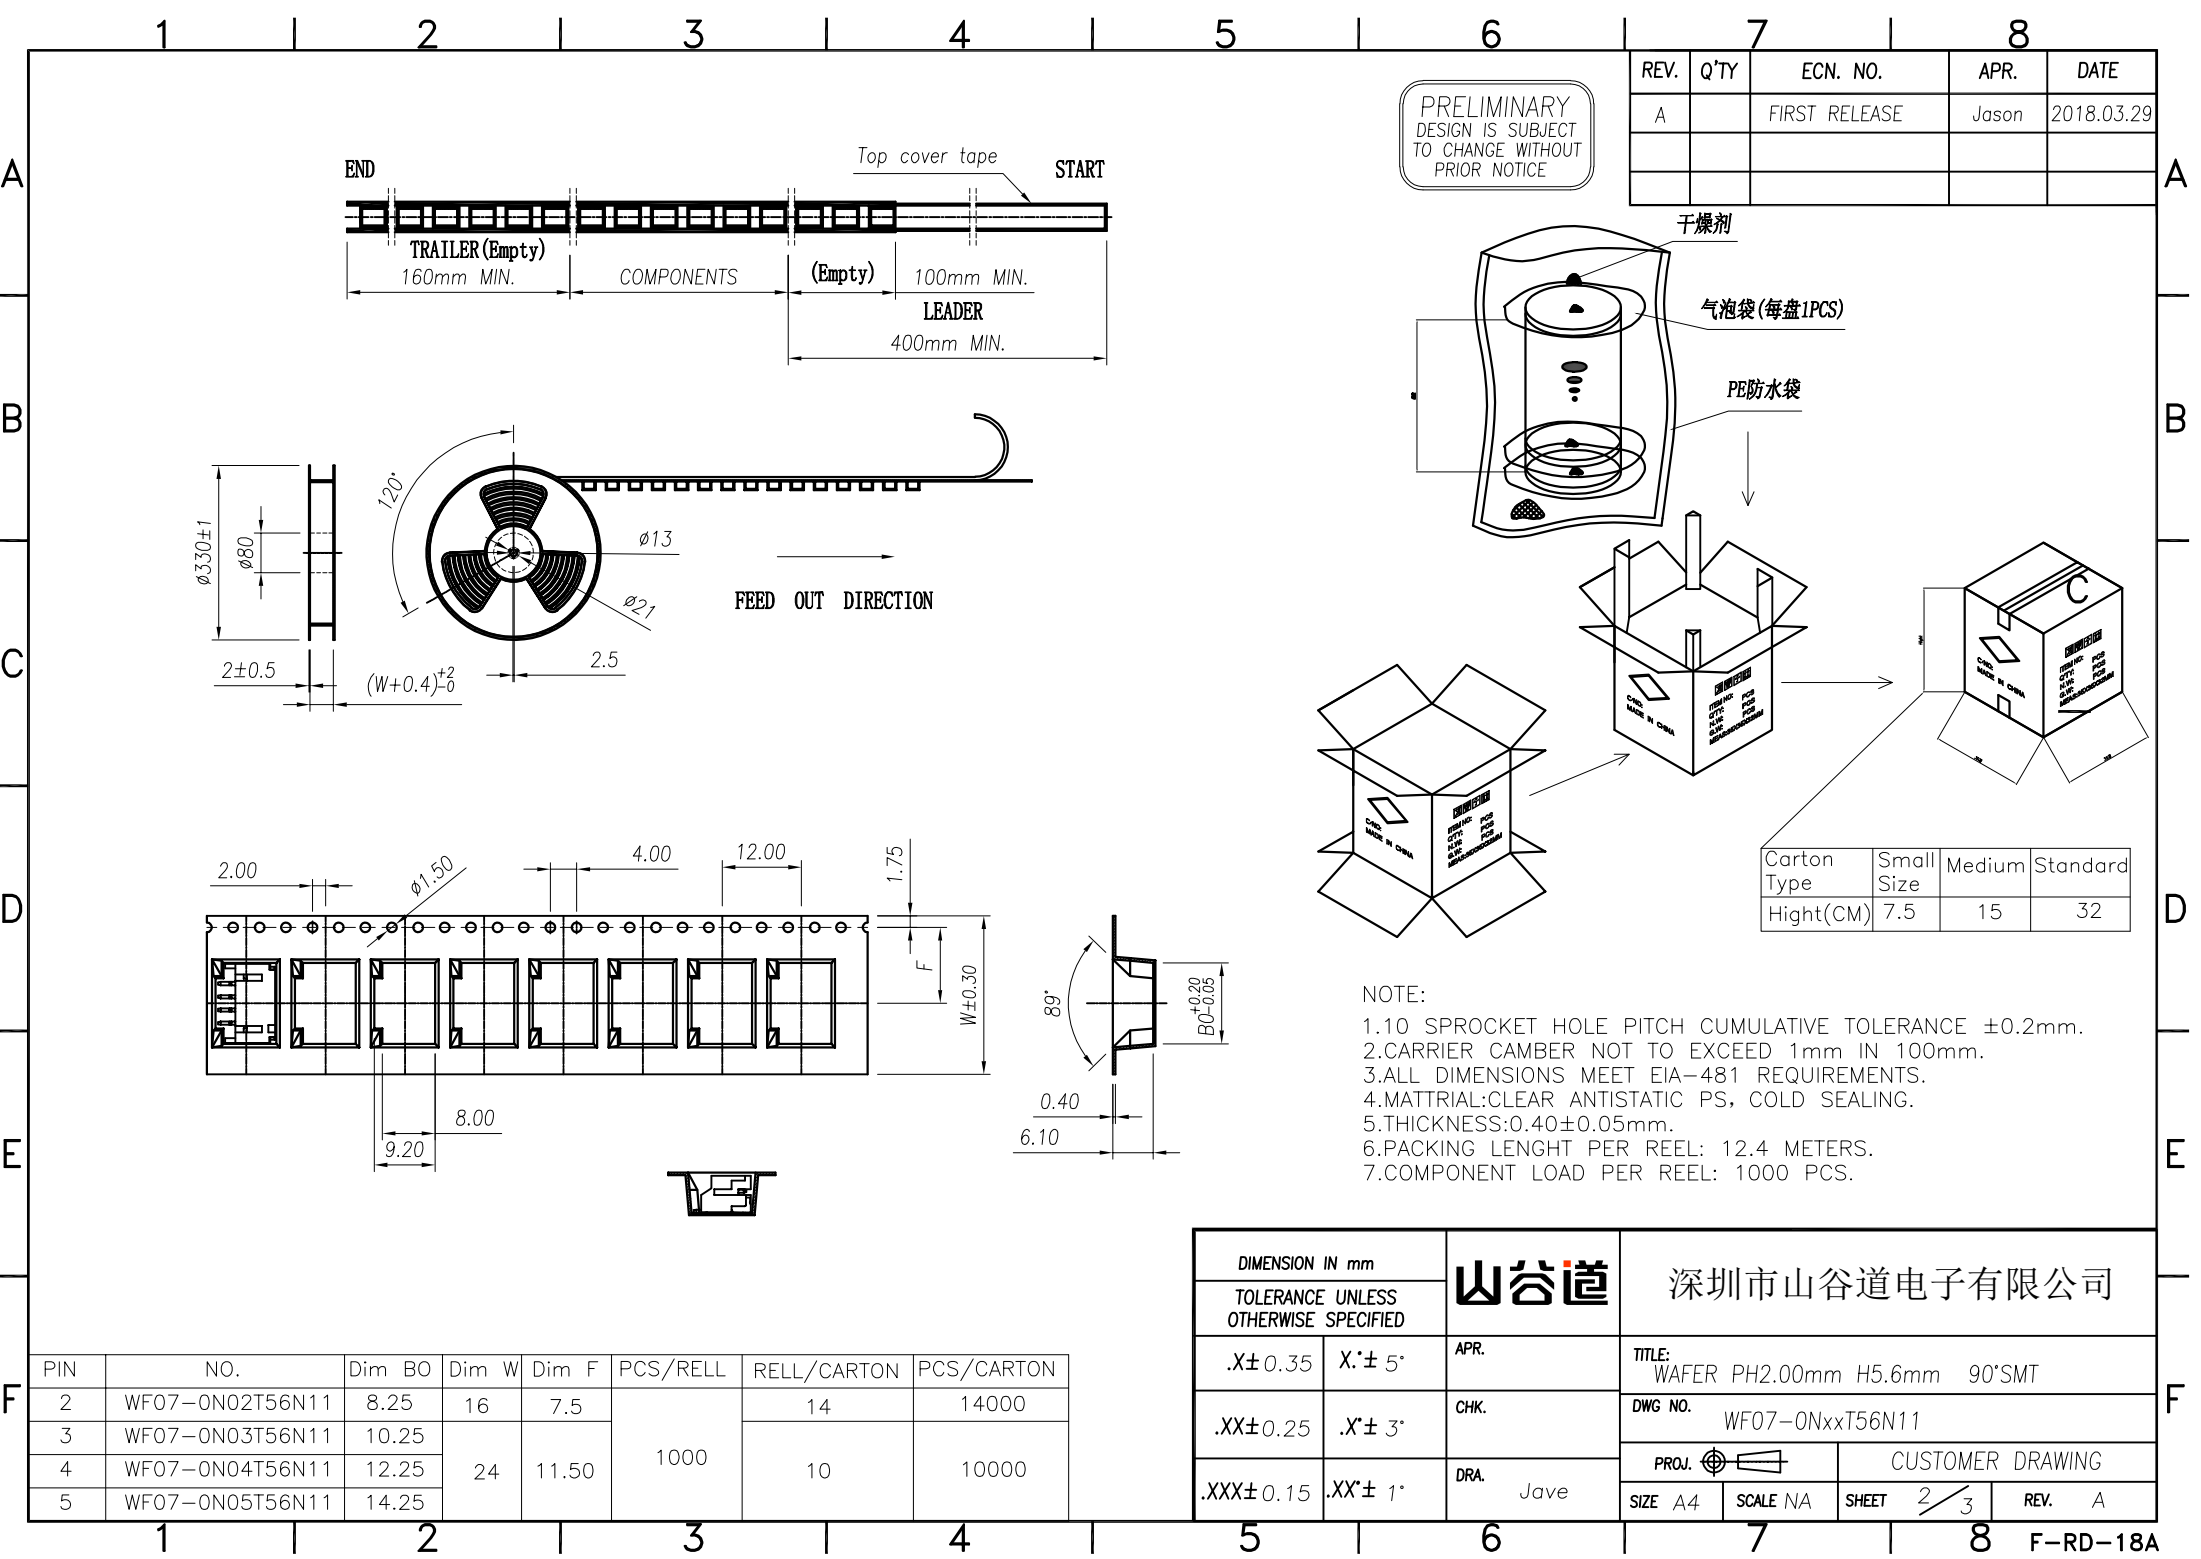

PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2018.03.29

Carton Type	Small Size	Medium	Standard
Hight(CM)	7.5	15	32

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
 - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
 - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
 - 5.THICKNESS: $0.40 \pm 0.05\text{mm}$.
 - 6.PACKING LENGTH PER REEL: 12.4 METERS.
 - 7.COMPONENT LOAD PER REEL: 1000 PCS.

PIN	NO.	Dim BO	Dim W	Dim F	PCS/RELL	RELL/CARTON	PCS/CARTON
2	WF07-0N02T56N11	8.25	16	7.5	1000	14	14000
3	WF07-0N03T56N11	10.25	24	11.50		10	10000
4	WF07-0N04T56N11	12.25					
5	WF07-0N05T56N11	14.25					

DIMENSION IN mm		山谷道	深圳市山谷道电子有限公司			
TOLERANCE UNLESS OTHERWISE SPECIFIED						
.X±0.35	X:± 5°	APR.	TITLE: WAFER PH2.00mm H5.6mm 90°SMT			
.XX±0.25	.X°± 3°	CHK.	DWG NO. WF07—0NxxT56N11			
.XXX±0.15	.XX°± 1°	DRA. Jave	PROJ. 		CUSTOMER DRAWING	
			SIZE A4	SCALE NA	SHEET 2/3	REV. A

A

A

B

B

C

C

D




D

E

E


F

F

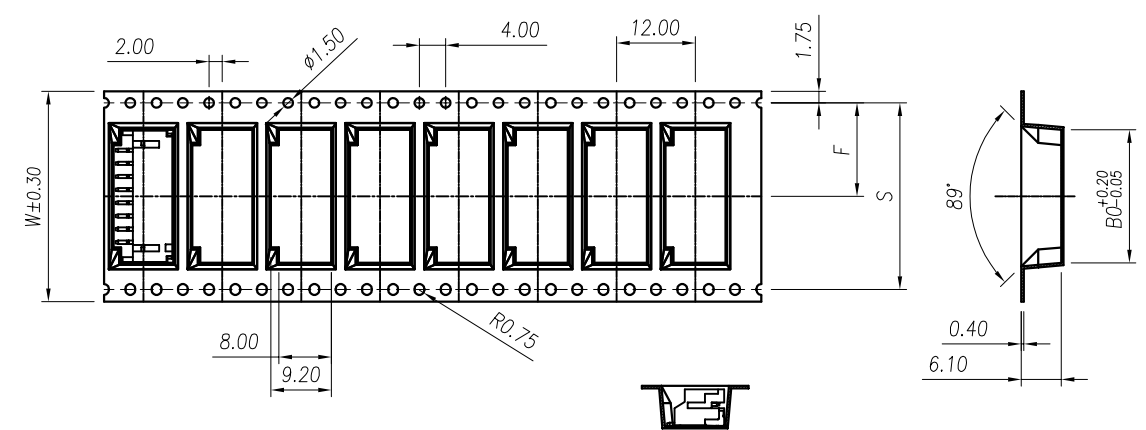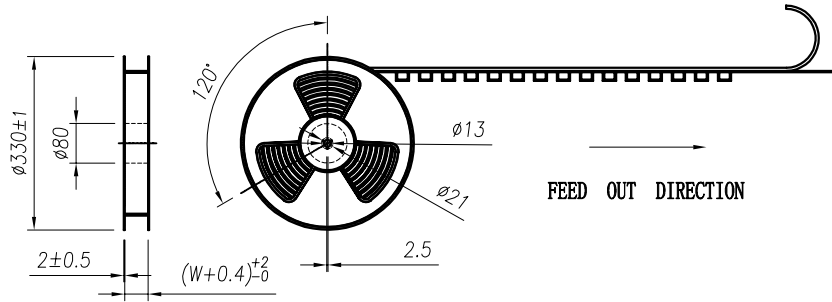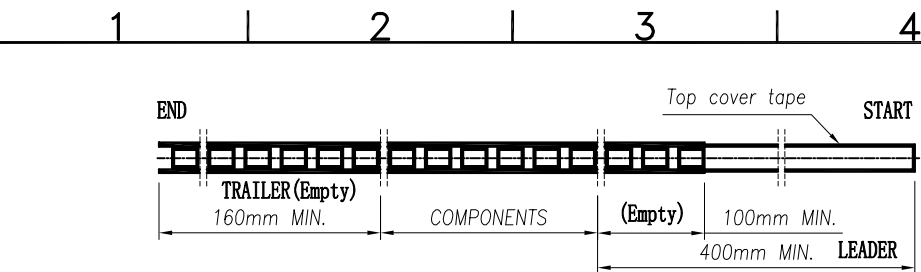

PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2018.03.29

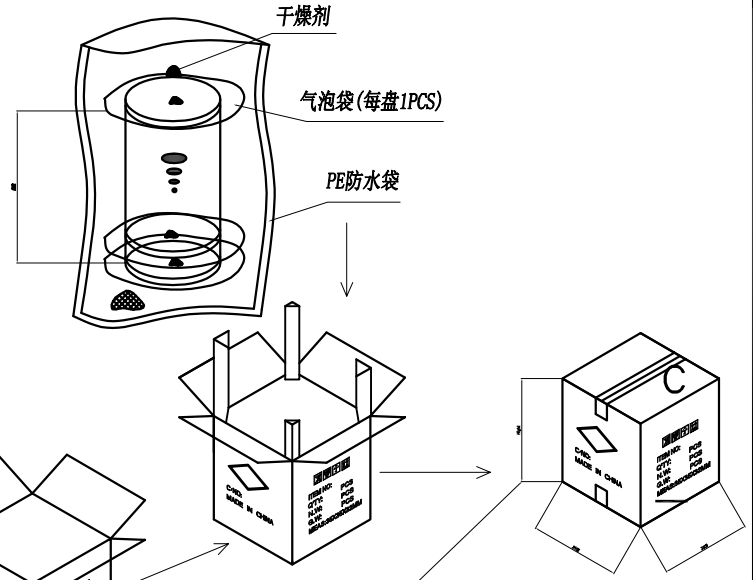

Carton Type	Small Size	Medium	Standard
Hight(CM)	7.5	15	32

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
 - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
 - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
 - 5.THICKNESS: $0.40 \pm 0.05\text{mm}$.
 - 6.PACKING LENGTH PER REEL: 12.4 METERS.
 - 7.COMPONENT LOAD PER REEL: 1000 PCS.

PIN	NO.	Dim BO	Dim W	Dim F	PCS/RELL	RELL/CARTON	PCS/CARTON
6	WF07-ON06T56N11	16.25	32	14.2	1000	8	8000
7	WF07-ON07T56N11	18.25					
8	WF07-ON08T56N11	20.25					
9	WF07-ON09T56N11	22.25	44	20.2		6	6000
10	WF07-ON10T56N11	24.25					
11	WF07-ON11T56N11	26.25					
12	WF07-ON12T56N11	28.25					
13	WF07-ON13T56N11	30.25					
14	WF07-ON14T56N11	32.25					
15	WF07-ON15T56N11	34.25	56	26.2		5	5000
16	WF07-ON16T56N11	36.25					

DIMENSION IN mm		山谷道	深圳市山谷道电子有限公司			
TOLERANCE UNLESS OTHERWISE SPECIFIED						
.X±0.35	X:± 5°	APR.	TITLE: WAFER PH2.00mm H5.6mm 90°SMT			
.XX±0.25	.X:± 3°	CHK.	DWG NO. WF07-ONxxT56N11			
.XXX±0.15	.XX:± 1°	DRA. Jave	PROJ. 		CUSTOMER DRAWING	
			SIZE A4	SCALE NA	SHEET 3 / 3	REV. A