


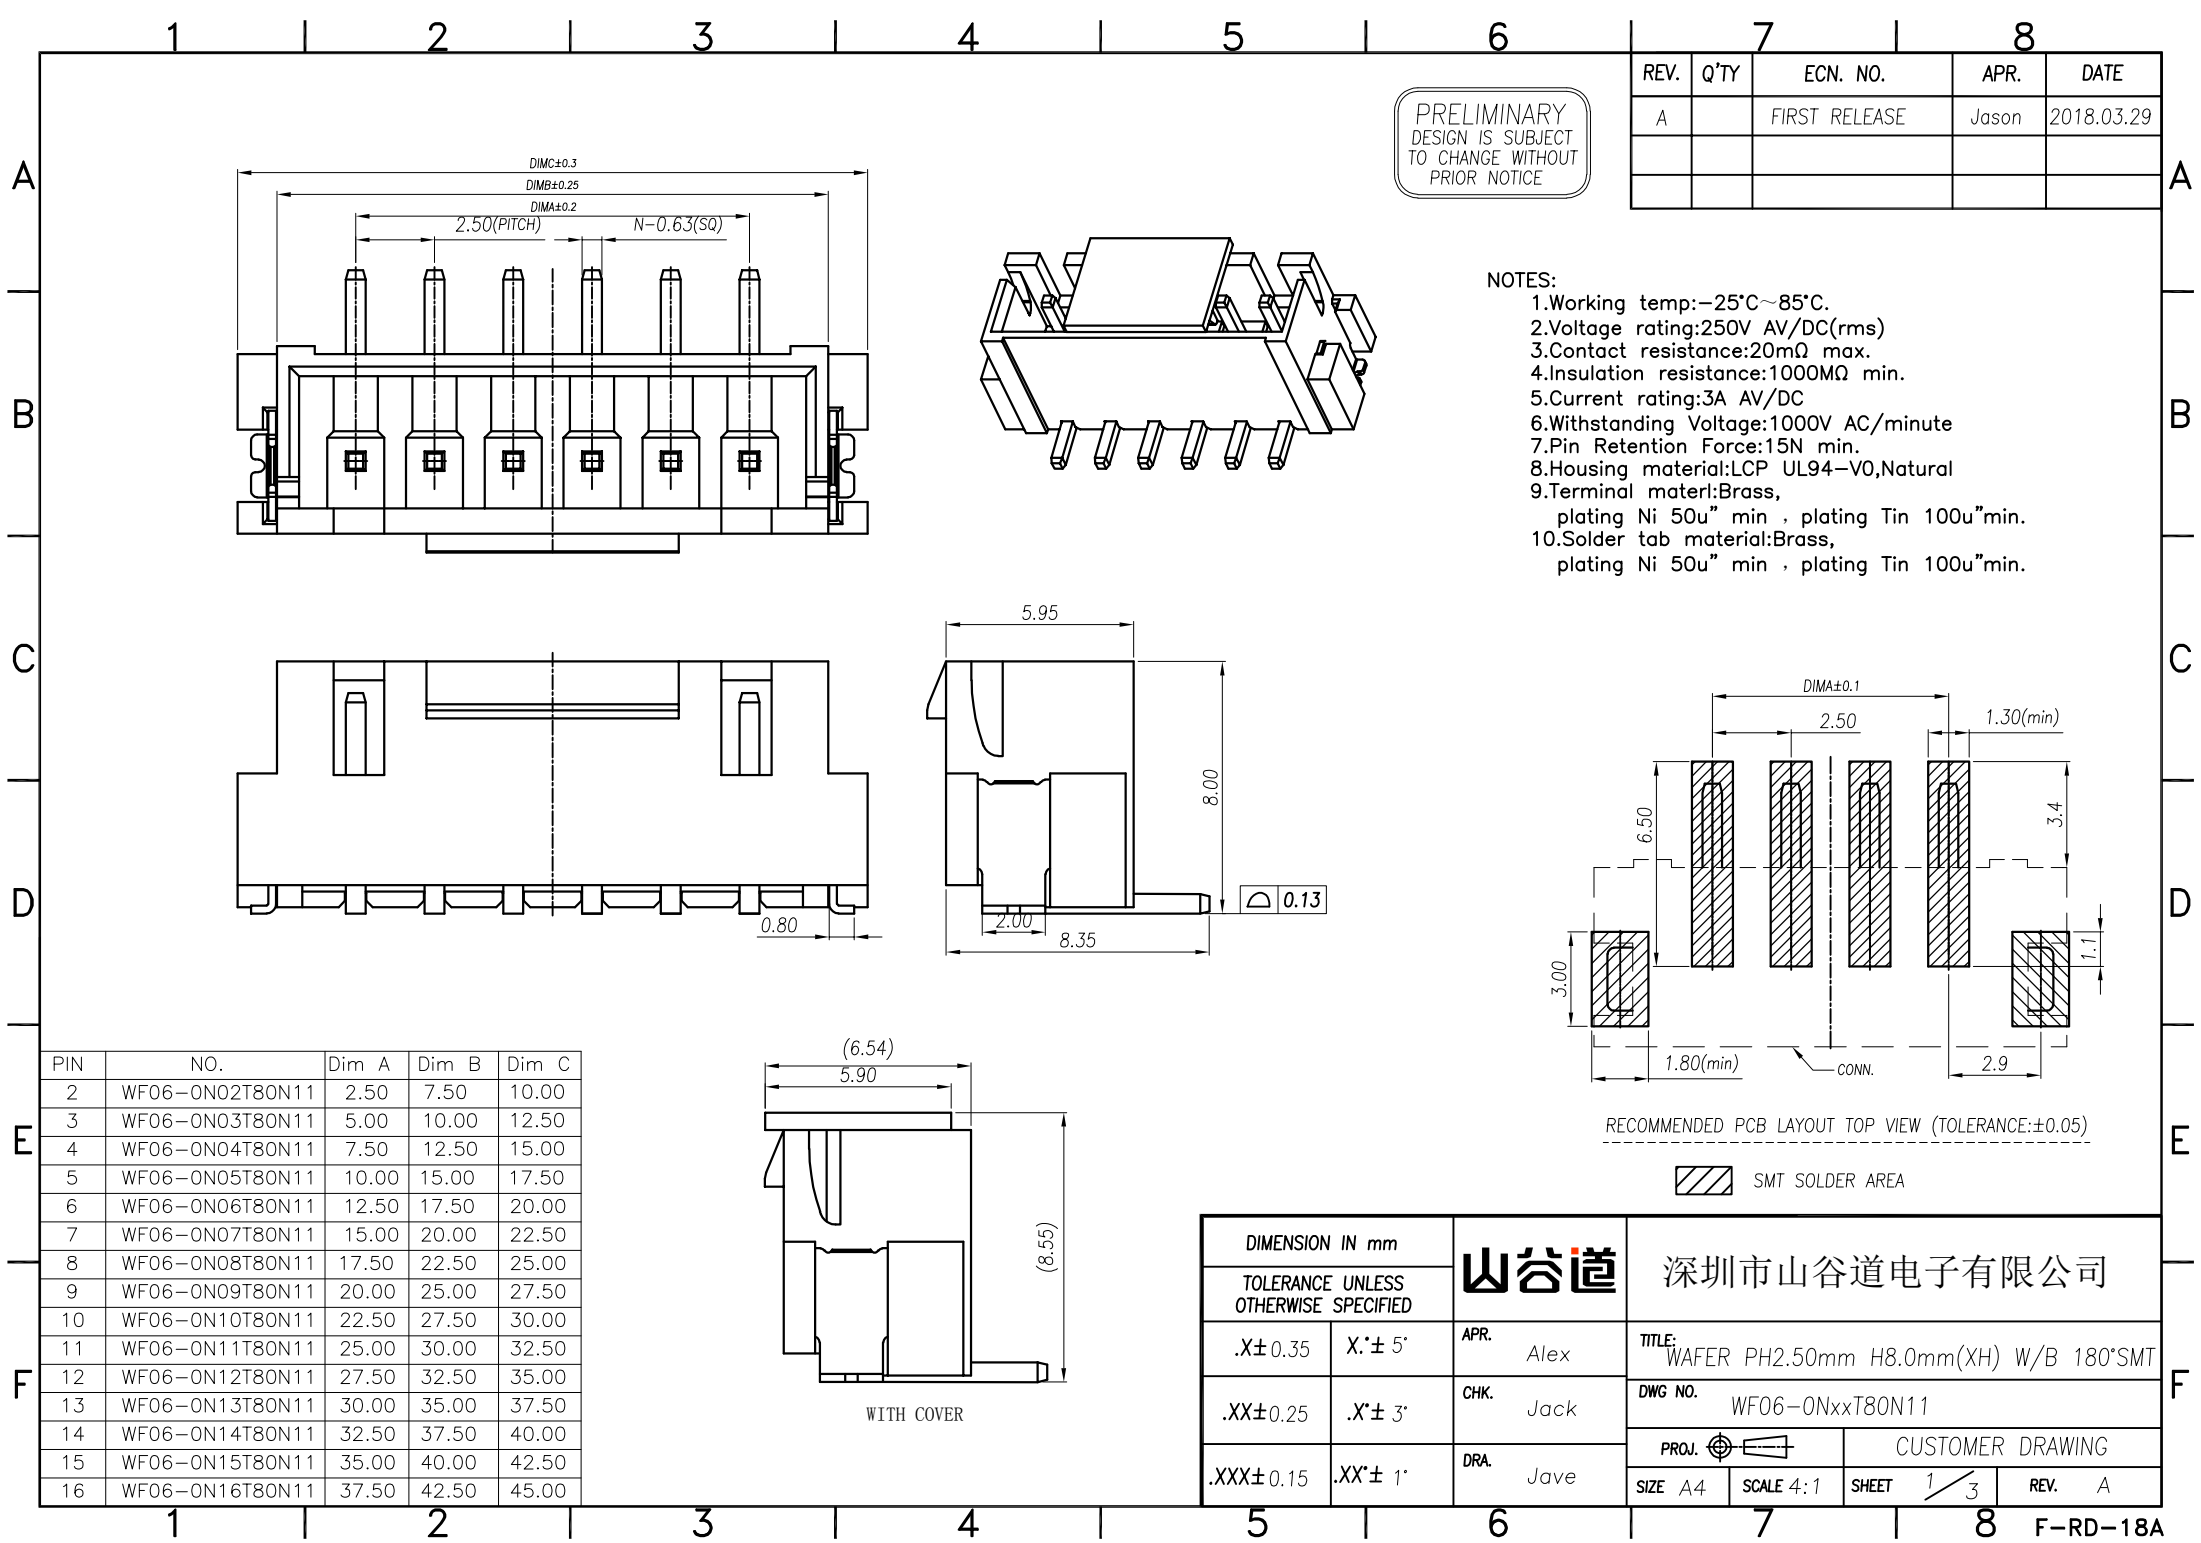


PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2018.03.29

- NOTES:
- Working temp:-25°C~85°C.
 - Voltage rating:250V AV/DC(rms)
 - Contact resistance:20mΩ max.
 - Insulation resistance:1000MΩ min.
 - Current rating:3A AV/DC
 - Withstanding Voltage:1000V AC/minute
 - Pin Retention Force:15N min.
 - Housing material:LCP UL94-V0,Natural
 - Terminal materi:Brass, plating Ni 50u" min , plating Tin 100u"min.
 - Solder tab material:Brass, plating Ni 50u" min , plating Tin 100u"min.

DIMENSION IN mm		山谷道	深圳市山谷道电子有限公司			
TOLERANCE UNLESS OTHERWISE SPECIFIED						
.X±0.35	X:± 5°	APR. Alex	TITLE: WAFER PH2.50mm H8.0mm(XH) W/B 180°SMT			
.XX±0.25	.X:± 3°	CHK. Jack	DWG NO. WF06-0NxxT80N11			
.XXX±0.15	.XX:± 1°	DRA. Jave	PROJ. 		CUSTOMER DRAWING	
			SIZE A4	SCALE 4:1	SHEET 1/3	REV. A

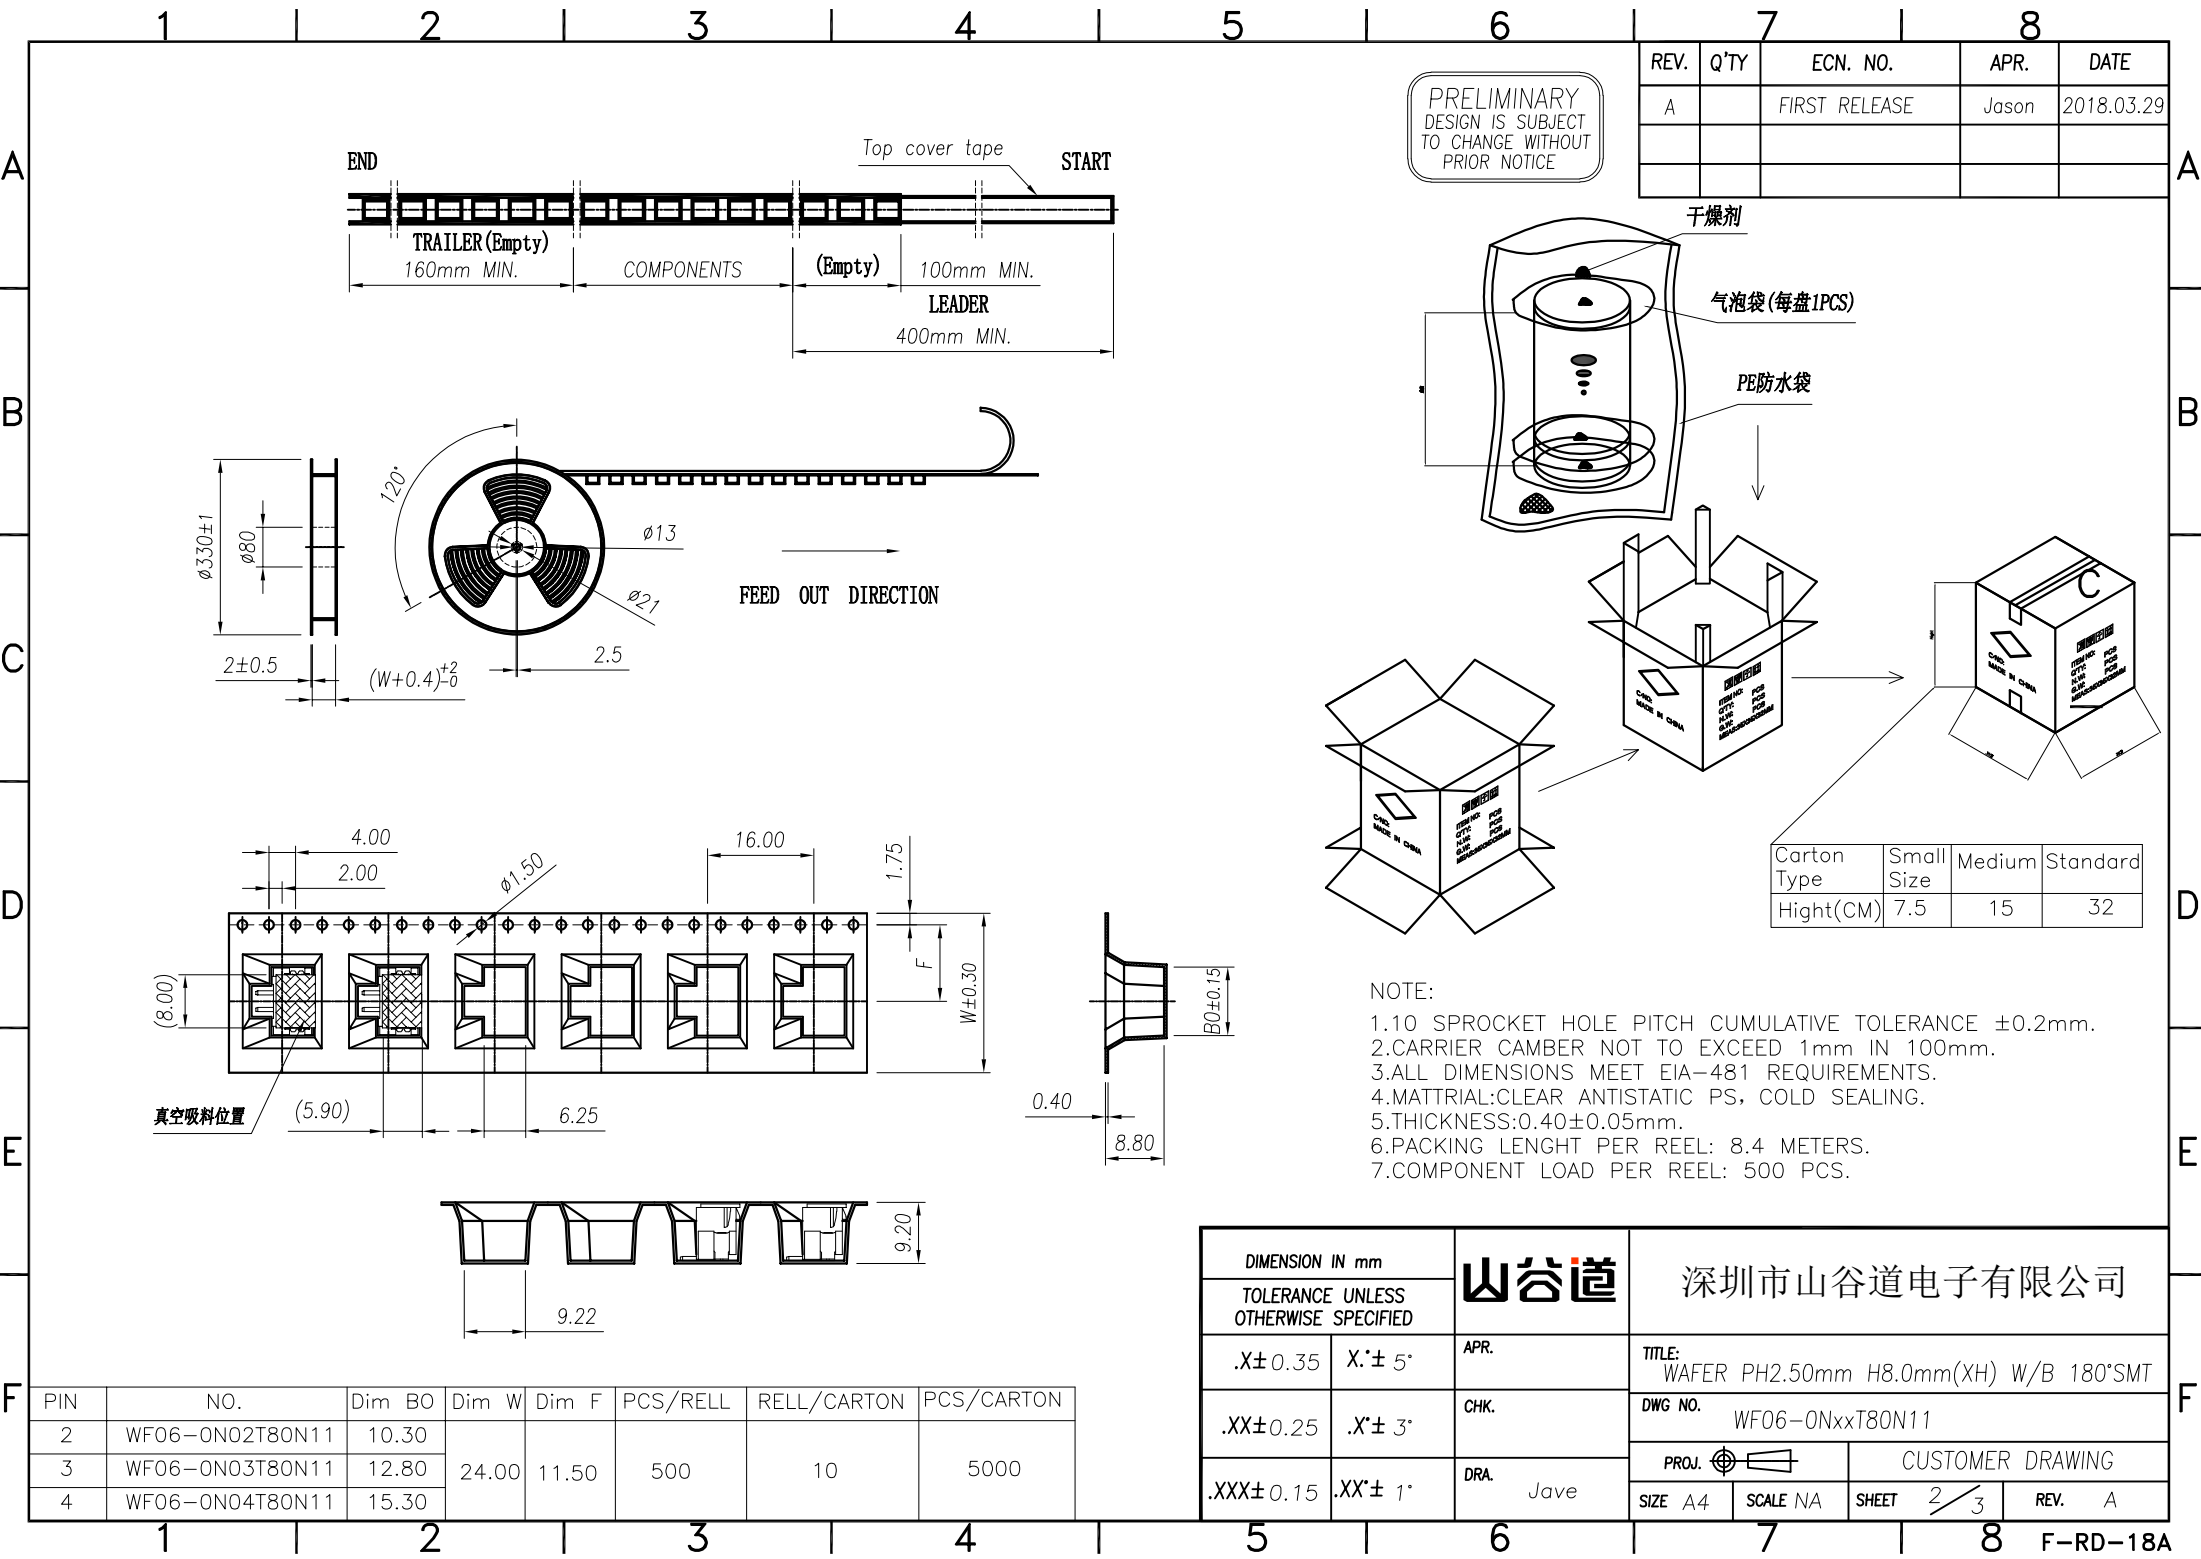

PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2018.03.29

Carton Type	Small Size	Medium	Standard
Hight(CM)	7.5	15	32

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
 - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
 - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
 - 5.THICKNESS: $0.40 \pm 0.05\text{mm}$.
 - 6.PACKING LENGTH PER REEL: 8.4 METERS.
 - 7.COMPONENT LOAD PER REEL: 500 PCS.

DIMENSION IN mm		山谷道	深圳市山谷道电子有限公司		
TOLERANCE UNLESS OTHERWISE SPECIFIED					
.X±0.35	X.± 5°	APR.	TITLE: WAFER PH2.50mm H8.0mm(XH) W/B 180°SMT		
.XX±0.25	.X.± 3°	CHK.	DWG NO. WF06-0NxxT80N11		
.XXX±0.15	.XX.± 1°	DRA. Jave	PROJ. 		CUSTOMER DRAWING
			SIZE A4	SCALE NA	SHEET 2/3

PIN	NO.	Dim BO	Dim W	Dim F	PCS/RELL	RELL/CARTON	PCS/CARTON
2	WF06-0N02T80N11	10.30	24.00	11.50	500	10	5000
3	WF06-0N03T80N11	12.80					
4	WF06-0N04T80N11	15.30					

A

B

C

D

E

F


A

B

D

E

F

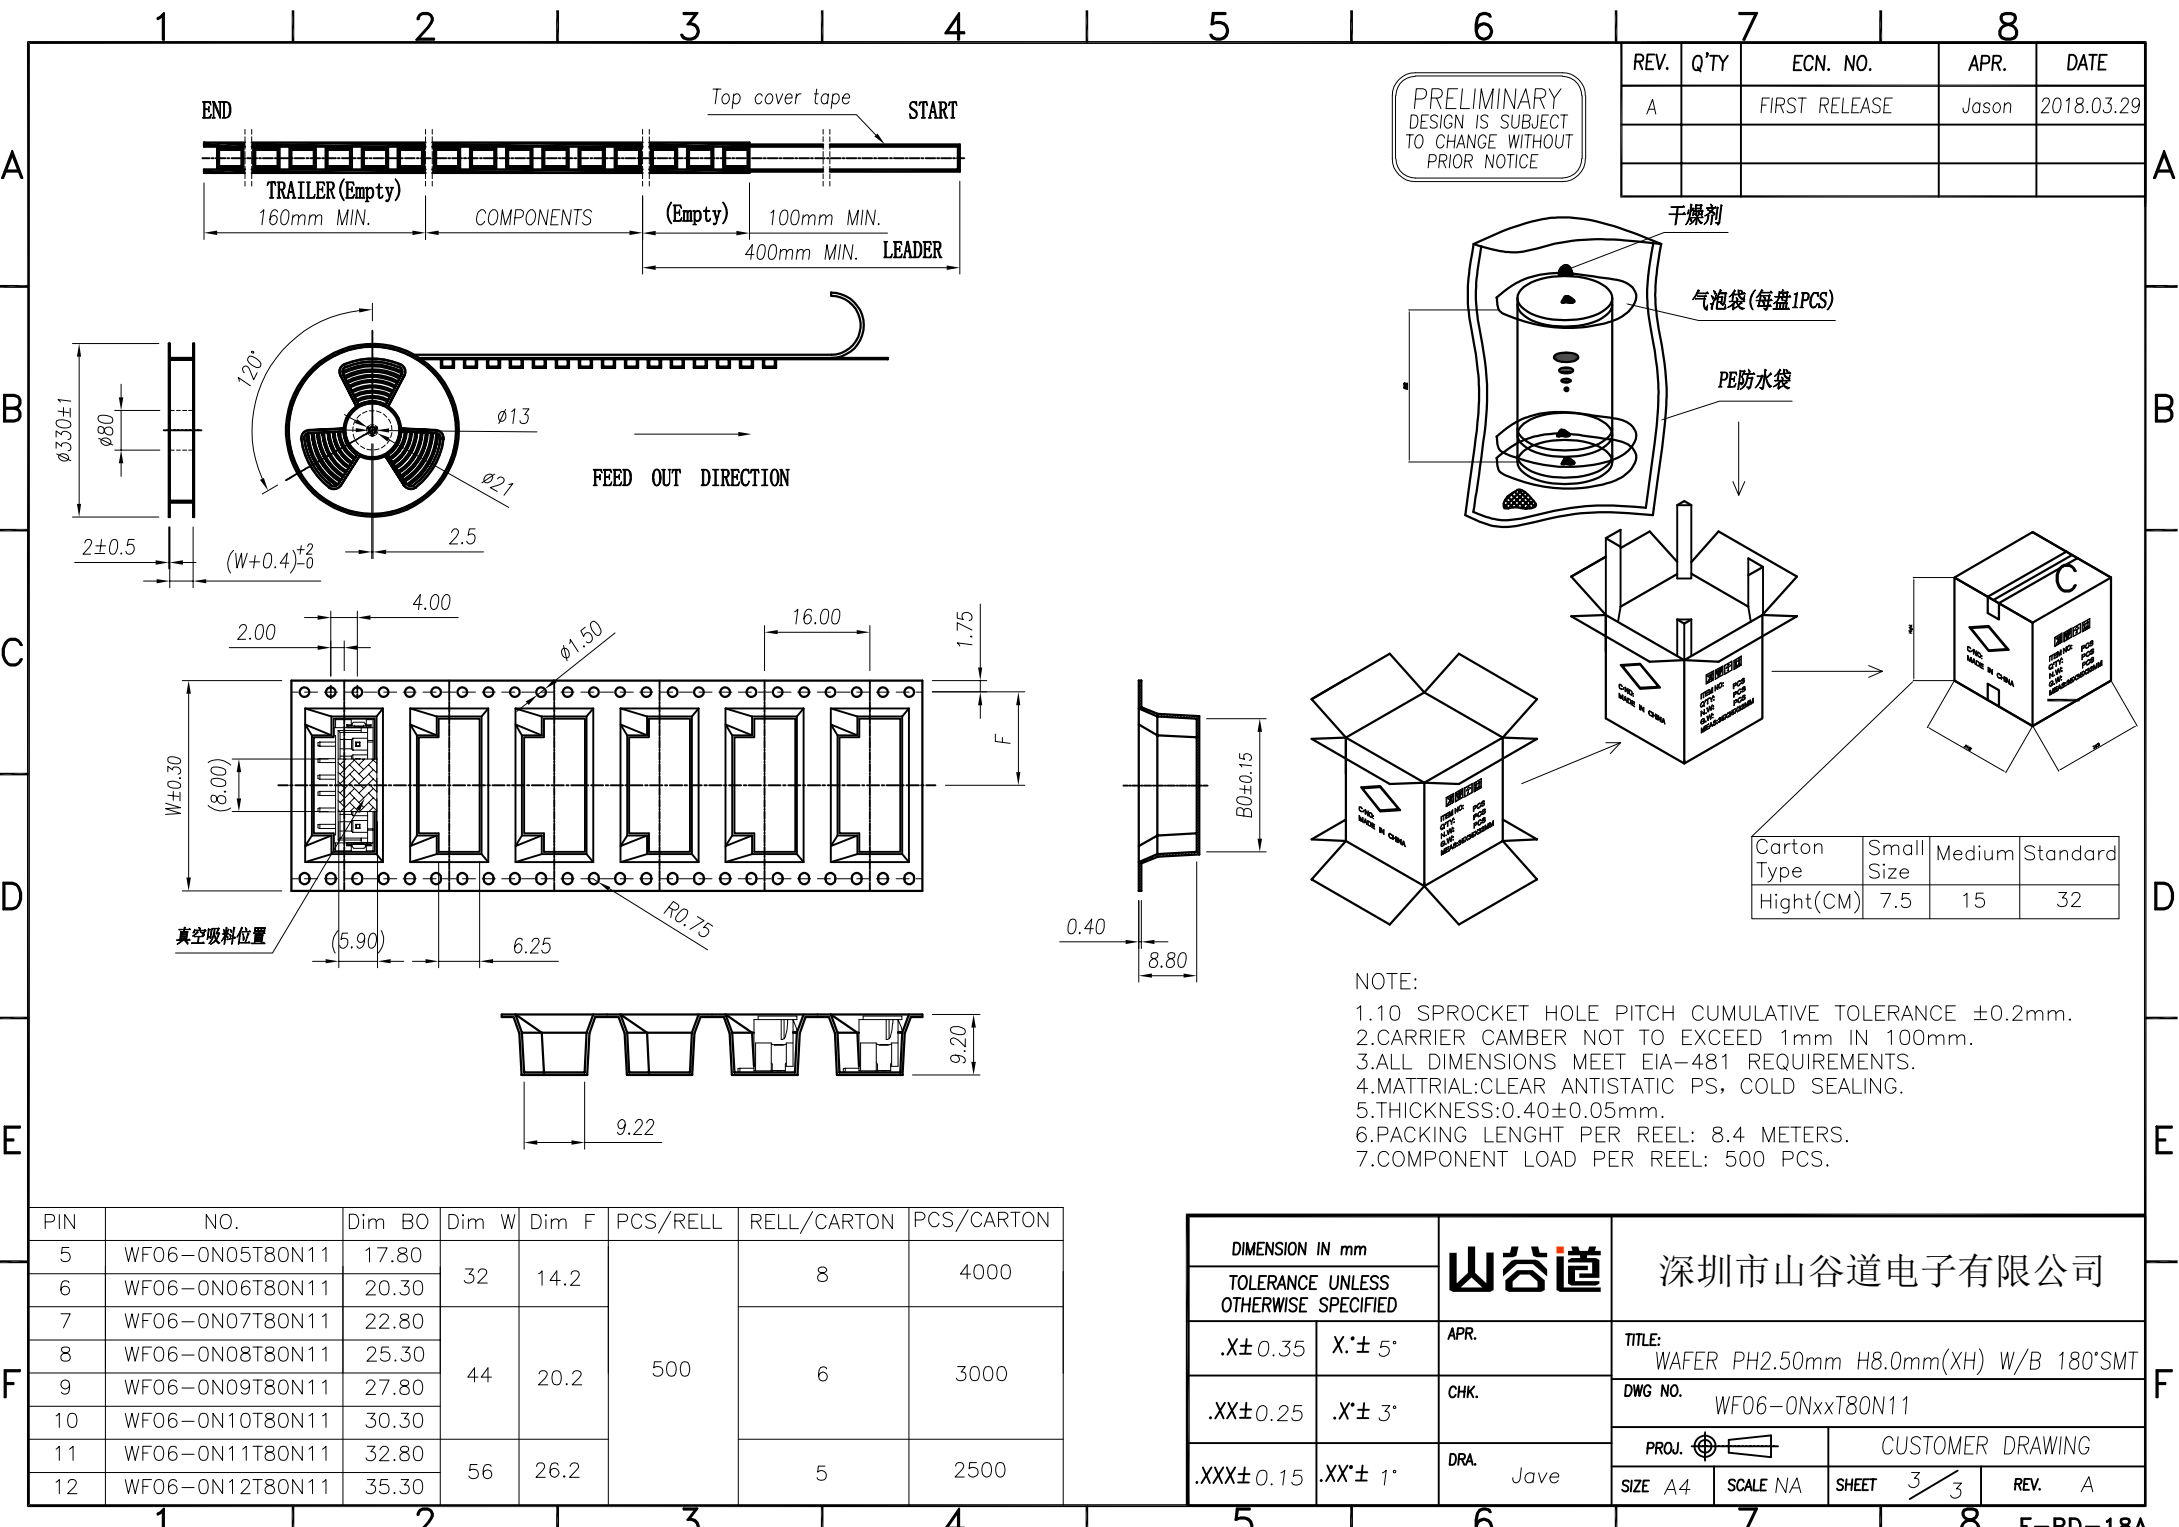

PRELIMINARY
DESIGN IS SUBJECT
TO CHANGE WITHOUT
PRIOR NOTICE

REV.	Q'TY	ECN. NO.	APR.	DATE
A		FIRST RELEASE	Jason	2018.03.29

Carton Type	Small Size	Medium	Standard
Hight (CM)	7.5	15	32

- NOTE:
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
 - 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
 - 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
 - 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
 - 5.THICKNESS: $0.40 \pm 0.05\text{mm}$.
 - 6.PACKING LENGTH PER REEL: 8.4 METERS.
 - 7.COMPONENT LOAD PER REEL: 500 PCS.

PIN	NO.	Dim BO	Dim W	Dim F	PCS/RELL	RELL/CARTON	PCS/CARTON
5	WF06-0N05T80N11	17.80	32	14.2	500	8	4000
6	WF06-0N06T80N11	20.30		44		20.2	6
7	WF06-0N07T80N11	22.80					
8	WF06-0N08T80N11	25.30					
9	WF06-0N09T80N11	27.80					
10	WF06-0N10T80N11	30.30	56	26.2		5	2500
11	WF06-0N11T80N11	32.80					
12	WF06-0N12T80N11	35.30					

DIMENSION IN mm		山谷道	深圳市山谷道电子有限公司			
TOLERANCE UNLESS OTHERWISE SPECIFIED						
.X±0.35	X:± 5°	APR.	TITLE: WAFER PH2.50mm H8.0mm(XH) W/B 180°SMT			
.XX±0.25	.X*± 3°	CHK.	DWG NO. WF06-0NxxT80N11			
.XXX±0.15	.XX*± 1°	DRA. Jave	PROJ. 		CUSTOMER DRAWING	
			SIZE A4	SCALE NA	SHEET 3 / 3	REV. A